

brightgreen



2020



brightgreen

LIGHTING FOR LIFE

Our products are certainly internationally distributed, but nonetheless they carry a strong “Designed in Australia” stamp on them.

This bold approach has influenced product designs which have positioned us as Australia’s most awarded lighting manufacturer. With more than 40 patents under our belt since 2008, the first downlight to win an award (D700+), and awards from even as far away as London, we have built a powerful reputation as experts in lighting design and manufacturing.

Our in-house and expert designers work on our product ranges from concept, all the way to quality control of the completed product. Everything from the look and the material used, to the lenses and even the digital drivers are 100% Brightgreen’s. After our production process, we then organise the assembly of our products within our own manufacturing plant.

We engineer only the highest quality components and LEDs - using our own custom phosphor - to achieve the brilliant lighting our Tru-Colour trademark requires. The trademark represents a proven industry leading light quality of up to CRI98, with R9 up to 95+ on the latest generation of products. We source our LEDs from Japan or South Korea depending on the best result for the product.

To provide a seamless experience with our products, we have also been developing our own digital driver technology. 96% of our products are supplied inclusive of our digital phase dimming drivers. Designed to be easily compatible with the majority of dimmers and automation systems, these offer a smooth dim from 100% down to 1%.*

Beautiful light and powerful control are only the beginning of what makes our lights an astounding lighting solution. We want our products to last as long as your design does, so we offer both a 7 year luminaire warranty and 5 year driver warranty on all of our lights.

Furthermore, we want our products end of life to be of minimal impact. Therefore, we use 100% pure aluminium in our production, ensuring excellent thermal management, electricity savings, and products that are 97% recyclable. By investing in Wind Farms in India, we also offset any carbon used in production offering truly Carbon Neutral products.

With Brightgreen, awarding winning designs and world-class lighting technologies bring your space to life.

*to check exact compatibility, please contact Brightgreen or your local representative









BRILLIANT DESIGNS DESERVE TRU-COLOUR

The Tru Colour spectrum surpasses industry metrics for light quality, giving our LEDs the highest CRI rating in the industry - with a score of up to 99 on CRI levels. However, we have found that CRI is an outdated value. That's why we place more value in our industry leading TM-30 rating of 99.


Tru Colour LEDs incorporate over 1 billion colours within its wavelengths. This provides the optimal lighting balance for your space, an overall sense of wellbeing, and enhances the appearance of interiors - making wood, food, and skin tones appear more natural and lifelike.

Make any space magical with Tru Colour illumination

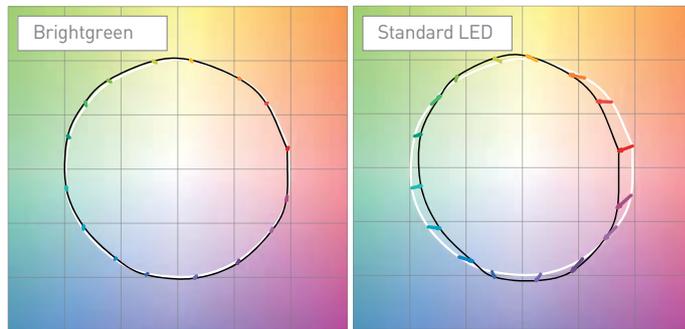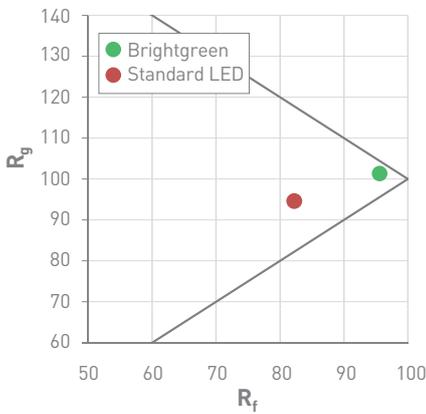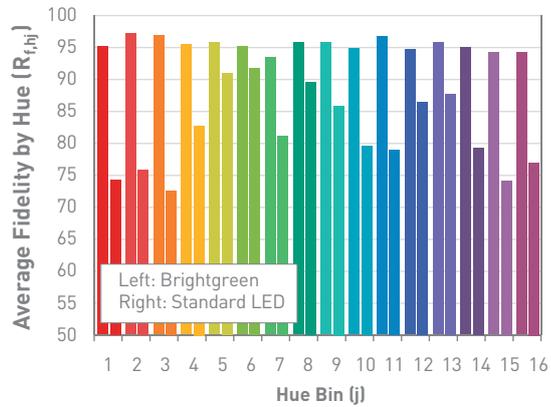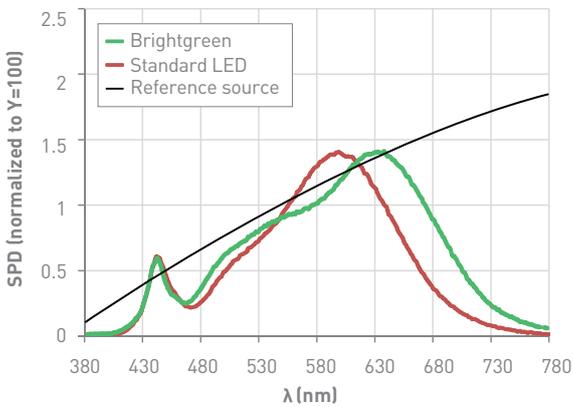

The Difference

We take greater pride in the measurements we achieve on the TM-30 scale. Nevertheless, Tru Colour is the industry leader in both lighting metrics

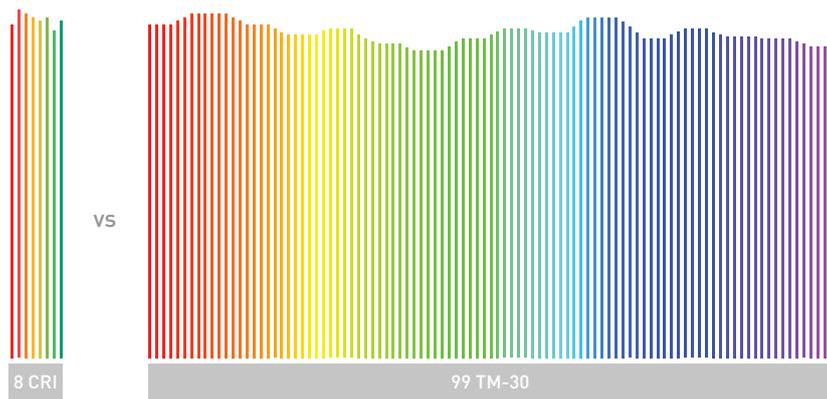





ETHICAL DESIGN & PRODUCTION

As part of its B Corporation certification, Brightgreen has made an official commitment to meet higher standards of social and environmental performance, transparency and accountability.

Each product in the range is designed, manufactured and distributed sustainably and ethically. As part of its ongoing commitment to improving the global community and the environment, Brightgreen offers a buy-back scheme, and offsets all areas of its organisation's embodied carbon footprint - including team member commutes.

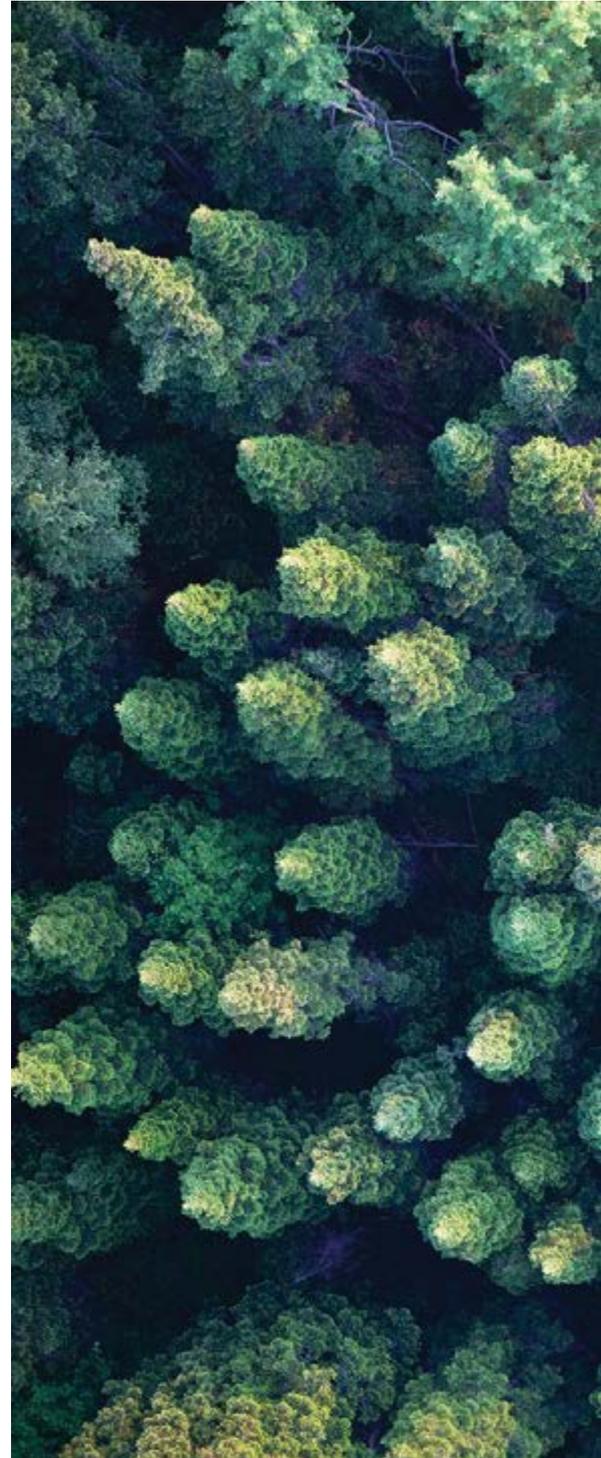

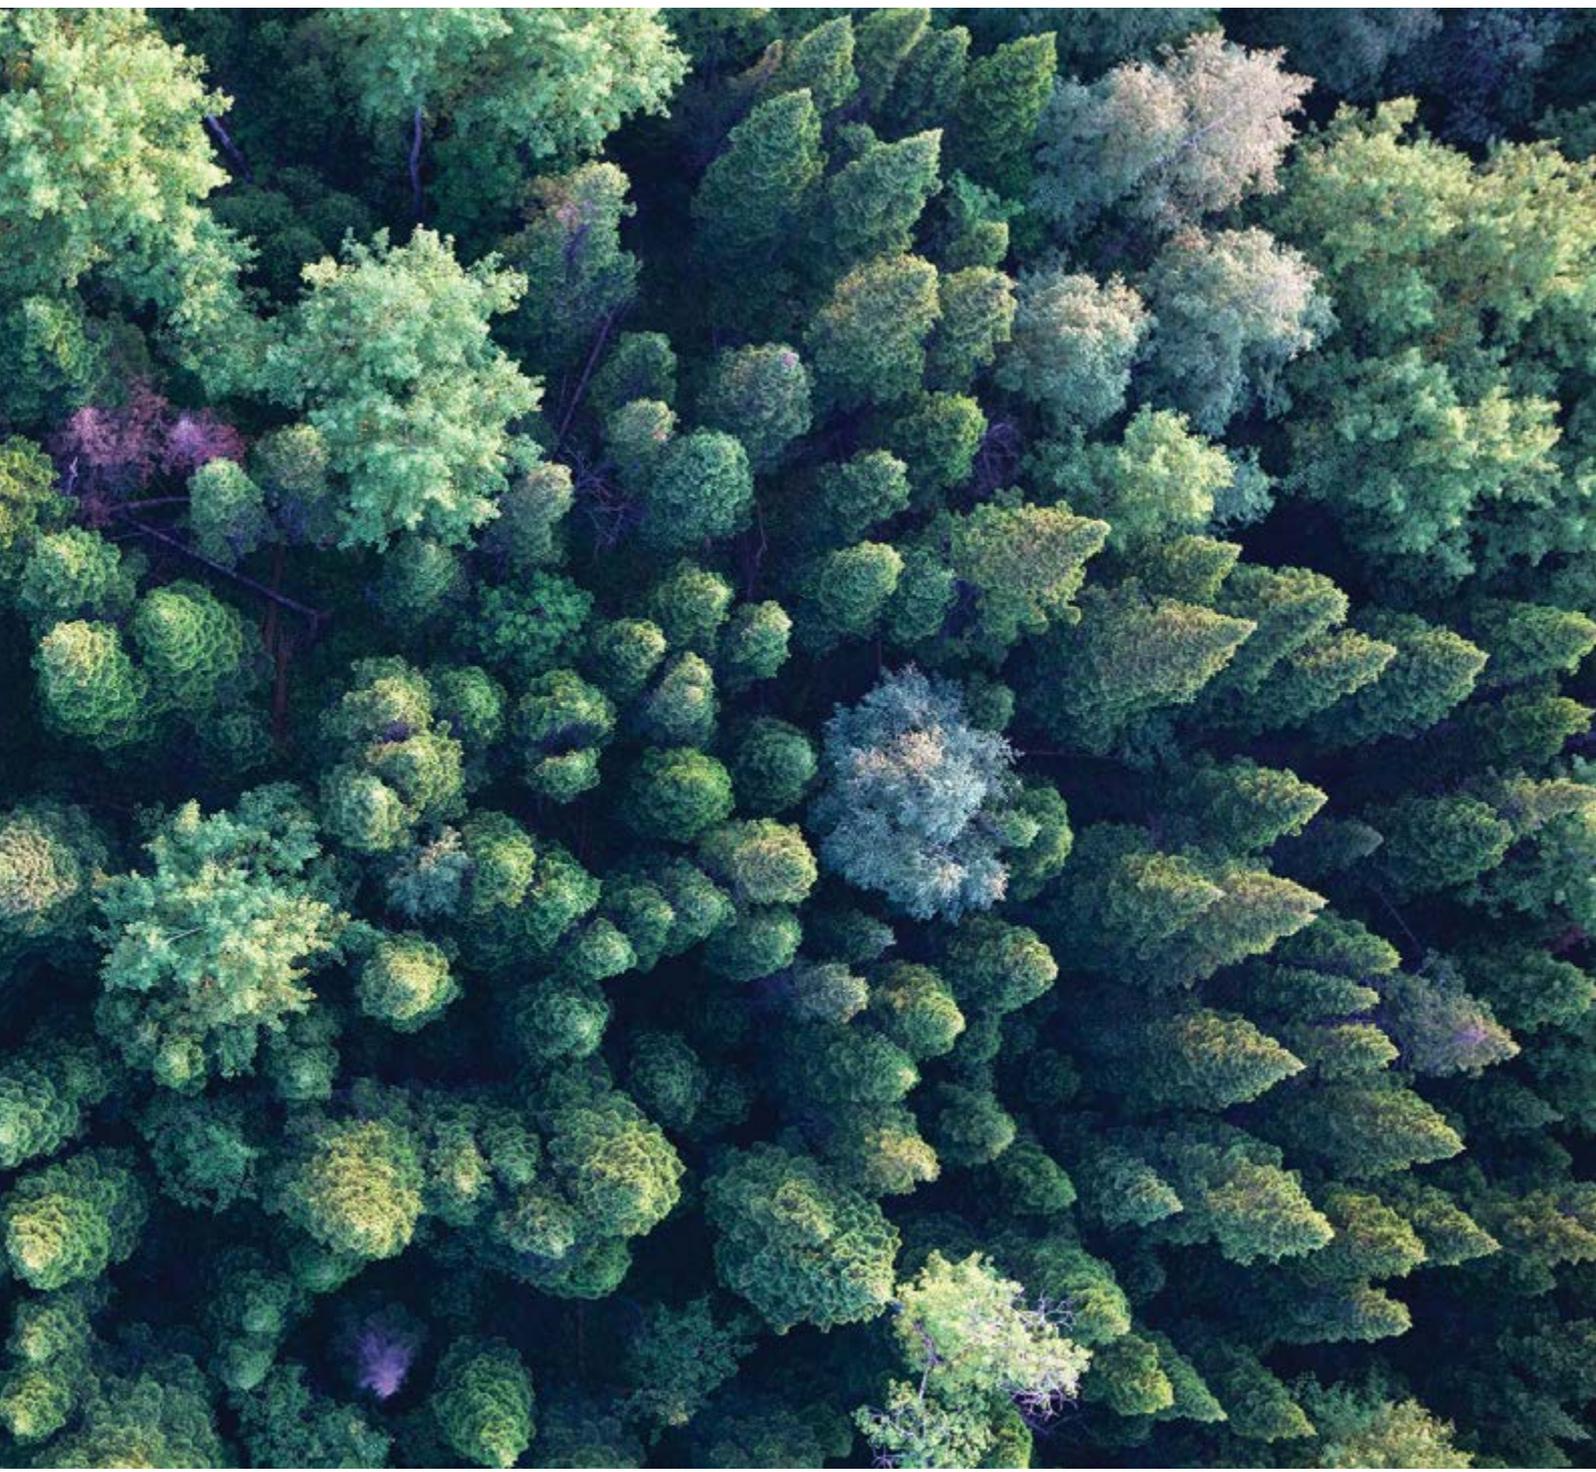

DIGITAL DRIVER

Engineered for seamless integration with leading dimmers and home automation systems, our adaptive digital driver reduces time spent troubleshooting, providing flicker-free, deep dimming.

FEATURING

- Additional controls provided, including; DALI, 0-10, Wireless.
- A smart integrated circuit that provides seamless compatibility with leading edge and trailing edge dimming systems.
- 4000V surge protection and advanced thermal control for extended product lifetime.
- Closed loop EMI circuit for smooth and silent dimming.

WORKS SEAMLESSLY WITH:



Visit our website to learn more:

BRIGHTGREEN.COM


TOMORROW'S DRIVER

TODAY

brightgreen.


SMOOTHEST DIMMING

Thanks to its smart IC and multi-function transistor, our digital driver regulates power input while simultaneously being able to pick up on the most sensitive voltage signals. This eliminates the most common problems experienced with dimmers including: flickering, dead travel and ghosting.

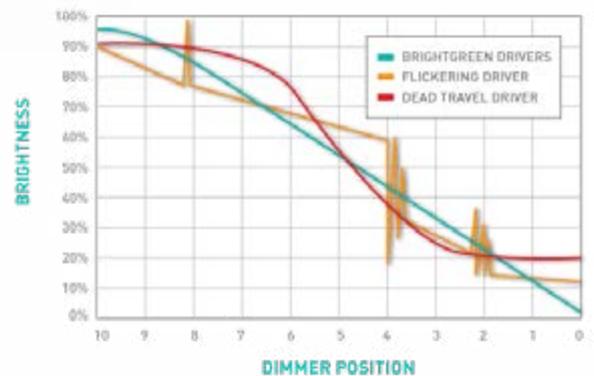


FLICKER FREE

Able to automatically detect and adapt to a broad range of dimmers, our flicker-free driver technology surpasses industry standards to reduce the level of imperceptible flicker standard to most LEDs.

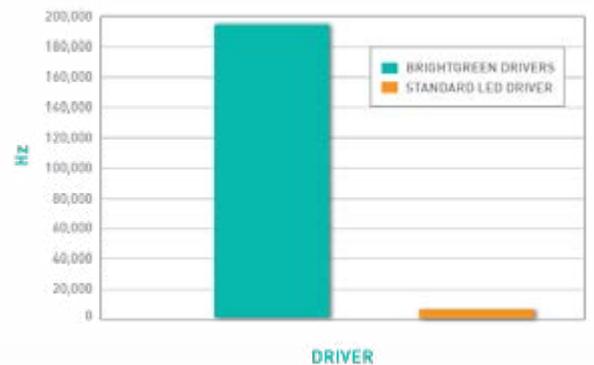

SURGE PROTECTION

Designed to handle unstable power supplies, our drivers come with advanced surge protection up to 4000V.

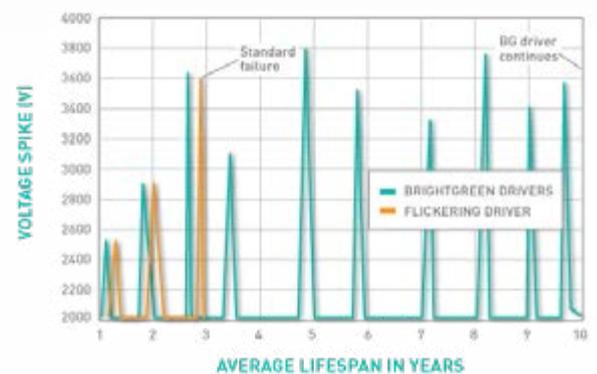

FIXED LINEAR

Recessed



D400
pg.14



D900
pg.16



D2000
pg.18

Surface



D400 SHX
pg.20



D900 SHX
pg.22



D2000 SHX
pg.24

Track



T400H
pg.26



T900H
pg.28



T2000H
pg.30

Wall



W2000H
pg.32

CUSTOM LINEAR STRIP

Recessed



R7
pg.34



R40
pg.36



R70
pg.38

Surface



S7
pg.40



S40
pg.42



S70
pg.44



S10X
pg.46

Pendant



P40
pg.48



P70
pg.50

Wall



SH44
pg.52

Cabinet



CH15
pg.54

CUBE

Recessed



D550
pg.58



D700
pg.60



D900
pg.62

Wall



W200
pg.64



W900
pg.66



W200 SX
pg.68



W900 SX
pg.70

Exterior



W500 IPS
pg.72



W700 IPSH
pg.74



W900 IPS
pg.76



W900 IPSH
pg.78

CURVE

Recessed



D550+
pg.82



D700+
pg.84



D700+ Trio
pg.86



D900+
pg.88



D2000+
pg.90



D550 Classic
pg.92



D700 Classic
pg.94



D700 W
pg.96



D900 Classic
pg.98



DR700
pg.100

Surface



D900 S
pg.102



D550 SH
pg.104



D900 SH
pg.106



D2000 SH
pg.108



D550 SHX
pg.110



D900 SHX
pg.112



D2000 SHX
pg.114

Track



T550 H
pg.116



T900 H
pg.118



T2000 H
pg.120



TR700
pg.122

Pendant



P900
pg.124

Wall



W200
pg.126



W900
pg.128



W200 SX
pg.130




W900 SX
pg.132

ACCESSORIES & DRIVER



Fascias
pg.136



Filters
pg.138



Tracks
pg.140



Track Acc
pg.142



Drivers
pg.144





LINEAR

CUBE

CURVE

ACCESSORIES




D400 Fixed Linear LED recessed




Electrical:	Circuit Wattage:	Delivered Light Efficacy:	Dimming:	Longevity:
	8W	55-56lm/W	Phase Dimming (Standard) DALI (special order)	L70 B10 = 50,000 Hrs L50 = 80,000 Hrs
Optical:	Delivered Lumens:	Colour Temperature:	Beam Angle:	Tru-Colour:
	440-450lm	3000K (3K) 4000K (4K) 2700K (2.7K) (special order) 5000K (5K) (special order)	10° 40°	Yes
Physical:	Hole Cutout:	Gimbal Angle:	Warranty:	IP Rating:
	45mm x 70mm	N/A	7 years of luminaire warranty & 5 years of driver warranty	IP44
	Type:	Body Colour:	Fascia Colour:	Fascia Style:
	Downlight	<input type="radio"/> White (W) <input type="radio"/> Black (B)	N/A	N/A

Photometrics:

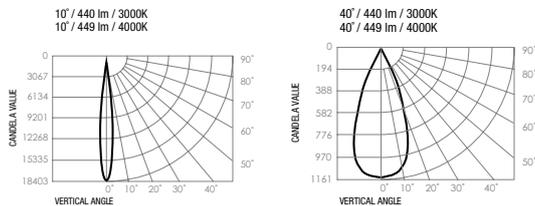

Dimensions:

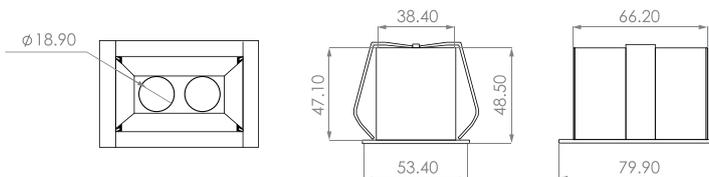

Specifying Product:

Product Name	Family	Colour Temp.	Beam Angle	Fascia Colour	Version No.	Eg. Product Code
D400	LN	3K 4K	10° 40°	White Black	2.0	D400-LN-3K-10-W-2.0




- Perfect for spotlighting smaller areas of interest in your design, the petite D400 Linear provides a stylish alternative to more traditional, round downlights.

D900 Fixed Linear LED recessed




Electrical:	Circuit Wattage: 16W	Delivered Light Efficacy: 59-61lm/W	Dimming: Phase Dimming (Standard) DALI (special order)	Longevity: L70 B10 = 50,000 Hrs L50 = 80,000 Hrs
Optical:	Delivered Lumens: 950-970lm	Colour Temperature: 3000K (3K) 4000K (4K) 2700K (2.7K) (special order) 5000K (5K) (special order)	Beam Angle: 10° 40°	Tru-Colour: Yes
Physical:	Hole Cutout: 45mm x 205mm	Gimbal Angle: N/A	Warranty: 7 years of luminaire warranty & 5 years of driver warranty	IP Rating: IP44
	Type: Downlight	Body Colour: ● White (W) ● Black (B)	Fascia Colour: N/A	Fascia Style: N/A

Photometrics:

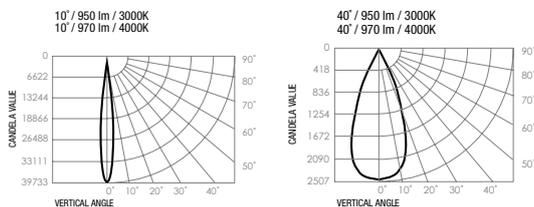

Dimensions:

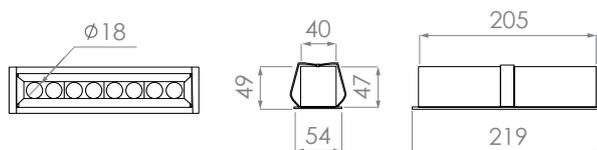

Specifying Product:	Product Name	Family	Colour Temp.	Beam Angle	Fascia Colour	Version No.	Eg. Product Code
	D900	LN	3K 4K	10° 40°	White Black	2.0	D900-LN-3K-10-W-2.0




- Featuring deeply recessed luminaires to combat the occurrence of glare, the D900 Linear adds depth and interest to ceilings during daylight hours, and washes them with Tru-Colour light quality in the evenings.

D2000 Fixed Linear LED recessed




Electrical:	Circuit Wattage: 33W	Delivered Light Efficacy: 61-62lm/W	Dimming: Phase Dimming (Standard) DALI (special order)	Longevity: L70 B10 = 50,000 Hrs L50 = 80,000 Hrs
Optical:	Delivered Lumens: 2000-2040lm	Colour Temperature: 3000K (3K) 4000K (4K) 2700K (2.7K) (special order) 5000K (5K) (special order)	Beam Angle: 10° 40°	Tru-Colour: Yes
Physical:	Hole Cutout: 45mm x 390mm	Gimbal Angle: N/A	Warranty: 7 years of luminaire warranty & 5 years of driver warranty	IP Rating: IP44
	Type: Downlight	Body Colour: <input type="radio"/> White (W) <input checked="" type="radio"/> Black (B)	Fascia Colour: N/A	Fascia Style: N/A

Photometrics:

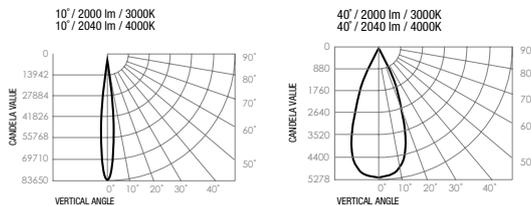

Dimensions:

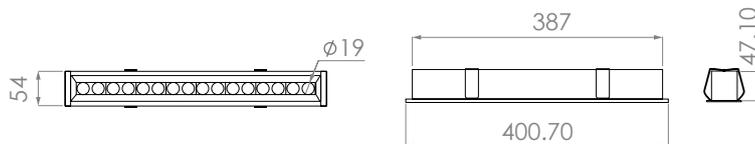

Specifying Product:	Product Name	Family	Colour Temp.	Beam Angle	Fascia Colour	Version No.	Eg. Product Code
	D2000	LN	3K 4K	10° 40°	White Black	2.0	D2000-LN-3K-10-W-2.0




- Projecting 2000 lumens of Tru-Colour brightness to enhance the appearance of interior colours, the D2000 Linear creates a uniform and minimalist aesthetic when paired with the rest of the Linear range.

D400 SHX Fixed Linear LED surface




Electrical:	Circuit Wattage: 8W	Delivered Light Efficacy: 55-56lm/W	Dimming: Phase Dimming (Standard)	Longevity: L70 B10 = 50,000 Hrs L50 = 80,000 Hrs
Optical:	Delivered Lumens: 440-450lm	Colour Temperature: 3000K (3K) 4000K (4K) 2700K (2.7K) (special order) 5000K (5K) (special order)	Beam Angle: 10° 40°	Tru-Colour: Yes
Physical:	Hole Cutout: 20mm	Gimbal Angle: 90° (360° rotation)	Warranty: 7 years of luminaire warranty & 5 years of driver warranty	IP Rating: IP44
	Type: Surface-mounted	Body Colour: <input type="radio"/> White (W) <input checked="" type="radio"/> Black (B)	Fascia Colour: N/A	Fascia Style: N/A

Photometrics:

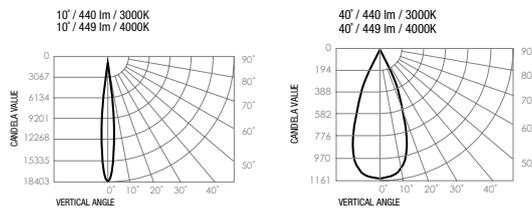

Dimensions:



Specifying Product:	Product Name	Family	Colour Temp.	Beam Angle	Body Colour	Version No.	Eg. Product Code
	D400.SHX	LN	3K	10°	White	2.0	D400.SHX-LN-3K-10-W-2.0
			4K	40°	Black		




- Designed for precision spot lighting, the flexible D400 SHX Linear is the perfect accompaniment to the rest of the surface-mounted Linear range, allowing you to maintain a consistent style no matter what type of illumination your space requires.

D900 SHX Fixed Linear LED surface




Electrical:	Circuit Wattage: 16W	Delivered Light Efficacy: 59-61lm/W	Dimming: Phase Dimming (Standard)	Longevity: L70 B10 = 50,000 Hrs L50 = 80,000 Hrs
Optical:	Delivered Lumens: 950-970lm	Colour Temperature: 3000K (3K) 4000K (4K) 2700K (2.7K) (special order) 5000K (5K) (special order)	Beam Angle: 10° 40°	Tru-Colour: Yes
Physical:	Hole Cutout: 20mm	Gimbal Angle: 90° (360° rotation)	Warranty: 7 years of luminaire warranty & 5 years of driver warranty	IP Rating: IP44
	Type: Surface-mounted	Body Colour: <input type="radio"/> White (W) <input checked="" type="radio"/> Black (B)	Fascia Colour: N/A	Fascia Style: N/A

Photometrics:

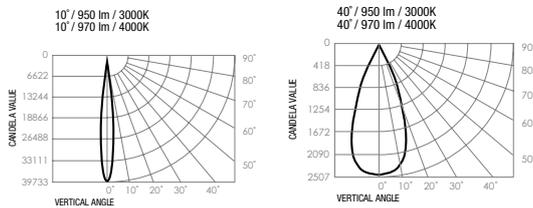

Dimensions:

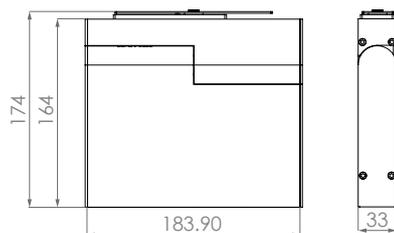

Specifying Product:	Product Name	Family	Colour Temp.	Beam Angle	Body Colour	Version No.	Eg. Product Code
	D900.SHX	LN	3K 4K	10° 40°	White Black	2.0	D900.SHX-LN-3K-10-W-2.0




- Ideal for modern interiors, the slimline D900 SHX Linear allows you to achieve a range of different lighting effects thanks to its interchangeable lenses.

D2000 SHX Fixed Linear LED surface




Electrical:	<u>Circuit Wattage:</u> 30W	<u>Delivered Light Efficacy:</u> 55-56lm/W	<u>Dimming:</u> Phase Dimming (Standard)	<u>Longevity:</u> L70 B10 = 50,000 Hrs L50 = 80,000 Hrs
Optical:	<u>Delivered Lumens:</u> 1620-1655lm	<u>Colour Temperature:</u> 3000K (3K) 4000K (4K) 2700K (2.7K) (special order) 5000K (5K) (special order)	<u>Beam Angle:</u> 10° 40°	<u>Tru-Colour:</u> Yes
Physical:	<u>Hole Cutout:</u> 20mm	<u>Gimbal Angle:</u> 90° (360° rotation)	<u>Warranty:</u> 7 years of luminaire warranty & 5 years of driver warranty	<u>IP Rating:</u> IP44
	<u>Type:</u> Surface-mounted	<u>Body Colour:</u> <input type="radio"/> White (W) <input checked="" type="radio"/> Black (B)	<u>Fascia Colour:</u> N/A	<u>Fascia Style:</u> N/A

Photometrics:

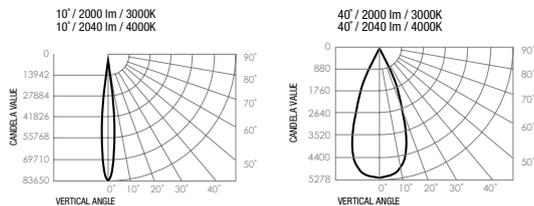

Dimensions:

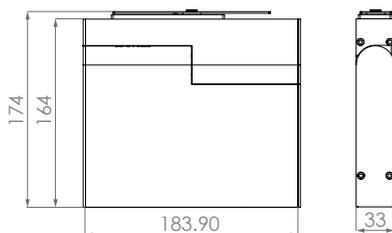

Specifying Product:

<u>Product Name</u>	<u>Family</u>	<u>Colour Temp.</u>	<u>Beam Angle</u>	<u>Body Colour</u>	<u>Version No.</u>	<u>Eg. Product Code</u>
D2000.SHX	LN	3K 4K	10° 40°	White Black	2.0	D2000.SHX-LN-3K-10-W-2.0



- The fully adjustable D2000 SHX Linear provides unparalleled power and precision, giving you the ability to direct 2000 lumens of Tru-Colour brightness in any direction you please.

T400 H Fixed Linear LED track light




Electrical:	Circuit Wattage: 8W	Delivered Light Efficacy: 55-56lm/W	Dimming: Phase Dimming (Standard)	Longevity: L70 B10 = 50,000 Hrs L50 = 80,000 Hrs
--------------------	-------------------------------	---	---	---


Optical:	Delivered Lumens: 440-450lm	Colour Temperature: 3000K (3K) 4000K (4K) 2700K (2.7K) (special order) 5000K (5K) (special order)	Beam Angle: 10° 40°	Tru-Colour: Yes
-----------------	---------------------------------------	--	----------------------------------	---------------------------

Physical:	Base: H-Track (Single circuit) Eurotrack (Three circuit - special order)	Gimbal Angle: 90° (360° rotation)	Warranty: 7 years of luminaire warranty & 5 years of driver warranty	IP Rating: IP44
	Type: Track light	Body Colour: <input type="radio"/> White (W) <input checked="" type="radio"/> Black (B)	Fascia Colour: N/A	Fascia Style: N/A

Photometrics:

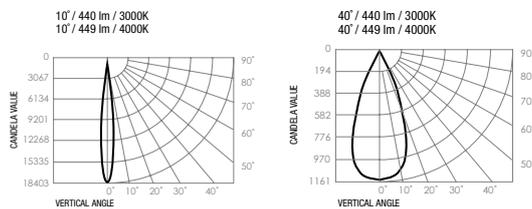

Dimensions:



Specifying Product:

Product Name	Base	Series	Colour Temp.	Beam Angle	Body Colour	Version No.	Eg. Product Code
T400.H	H1	LN	3K	10°	White	2.0	T400.H.H1-LN-3K-10-W-2.0
	E3		4K	40°	Black		



- The T400 H Linear provides a focused beam, ideal for precision lighting and creating contrast in interiors. Pair it with the larger track lights in the Linear range, or use it on its own to highlight interior features.

T900 H Fixed Linear LED track light




Electrical:	Circuit Wattage: 16W	Delivered Light Efficacy: 59-61lm/W	Dimming: Phase Dimming (Standard)	Longevity: L70 B10 = 50,000 Hrs L50 = 80,000 Hrs
--------------------	--------------------------------	---	--	---


Optical:	Delivered Lumens: 950-970lm	Colour Temperature: 3000K (3K) 4000K (4K) 2700K (2.7K) (special order) 5000K (5K) (special order)	Beam Angle: 10° 40°	Tru-Colour: Yes
-----------------	---------------------------------------	--	----------------------------------	---------------------------

Physical:	Base: H-Track (Single circuit) Eurotrack (Three circuit - special order)	Gimbal Angle: 90° (360° rotation)	Warranty: 7 years of luminaire warranty & 5 years of driver warranty	IP Rating: IP44
	Type: Track light	Body Colour: <input type="radio"/> White (W) <input checked="" type="radio"/> Black (B)	Fascia Colour: N/A	Fascia Style: N/A

Photometrics:

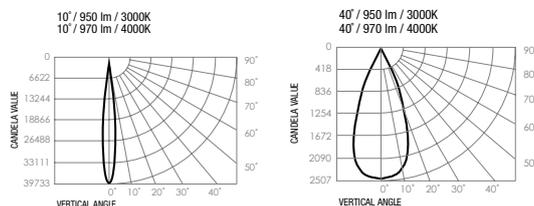

Dimensions:

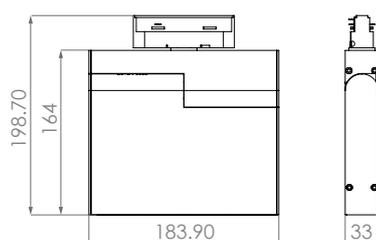

Specifying Product:

Product Name	Base	Series	Colour Temp.	Beam Angle	Body Colour	Version No.	Eg. Product Code
T900.H	H1	LN	3K	10°	White	2.0	T900.H.H1-LN-3K-10-W-2.0
	E3		4K	40°	Black		




- The fully adjustable T900 H Linear track light combines Tru-Colour illumination with unparalleled flexibility – allowing occupiers to choose from a range of interchangeable lenses to create a truly unique lighting design.

T2000 H Fixed Linear LED track light




Electrical:	Circuit Wattage:	Delivered Light Efficacy:	Dimming:	Longevity:
	30W	55-56lm/W	Phase Dimming (Standard)	L70 B10 = 50,000 Hrs L50 = 80,000 Hrs
Optical:	Delivered Lumens:	Colour Temperature:	Beam Angle:	Tru-Colour:
	1620-1655lm	3000K (3K) 4000K (4K) 2700K (2.7K) [special order] 5000K (5K) [special order]	10° 40°	Yes
Physical:	Base:	Gimbal Angle:	Warranty:	IP Rating:
	H-Track (Single circuit) Eurotrack (Three circuit - special order)	90° (360° rotation)	7 years of luminaire warranty & 5 years of driver warranty	IP44
	Type:	Body Colour:	Fascia Colour:	Fascia Style:
	Track light	<input type="radio"/> White (W) <input checked="" type="radio"/> Black (B)	N/A	N/A


Photometrics:

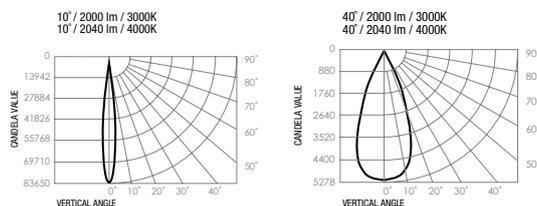

Dimensions:

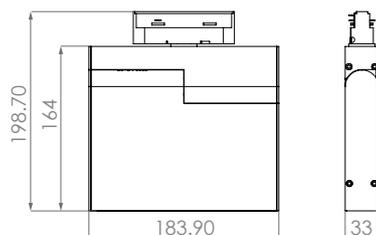

Specifying Product:	Product Name	Base	Series	Colour Temp.	Beam Angle	Body Colour	Version No.	Eg. Product Code
	T2000.H	H1	LN	3K	10°	White	2.0	T2000.H.H1-LN-3K-10-W-2.0
		E3		4K	40°	Black		

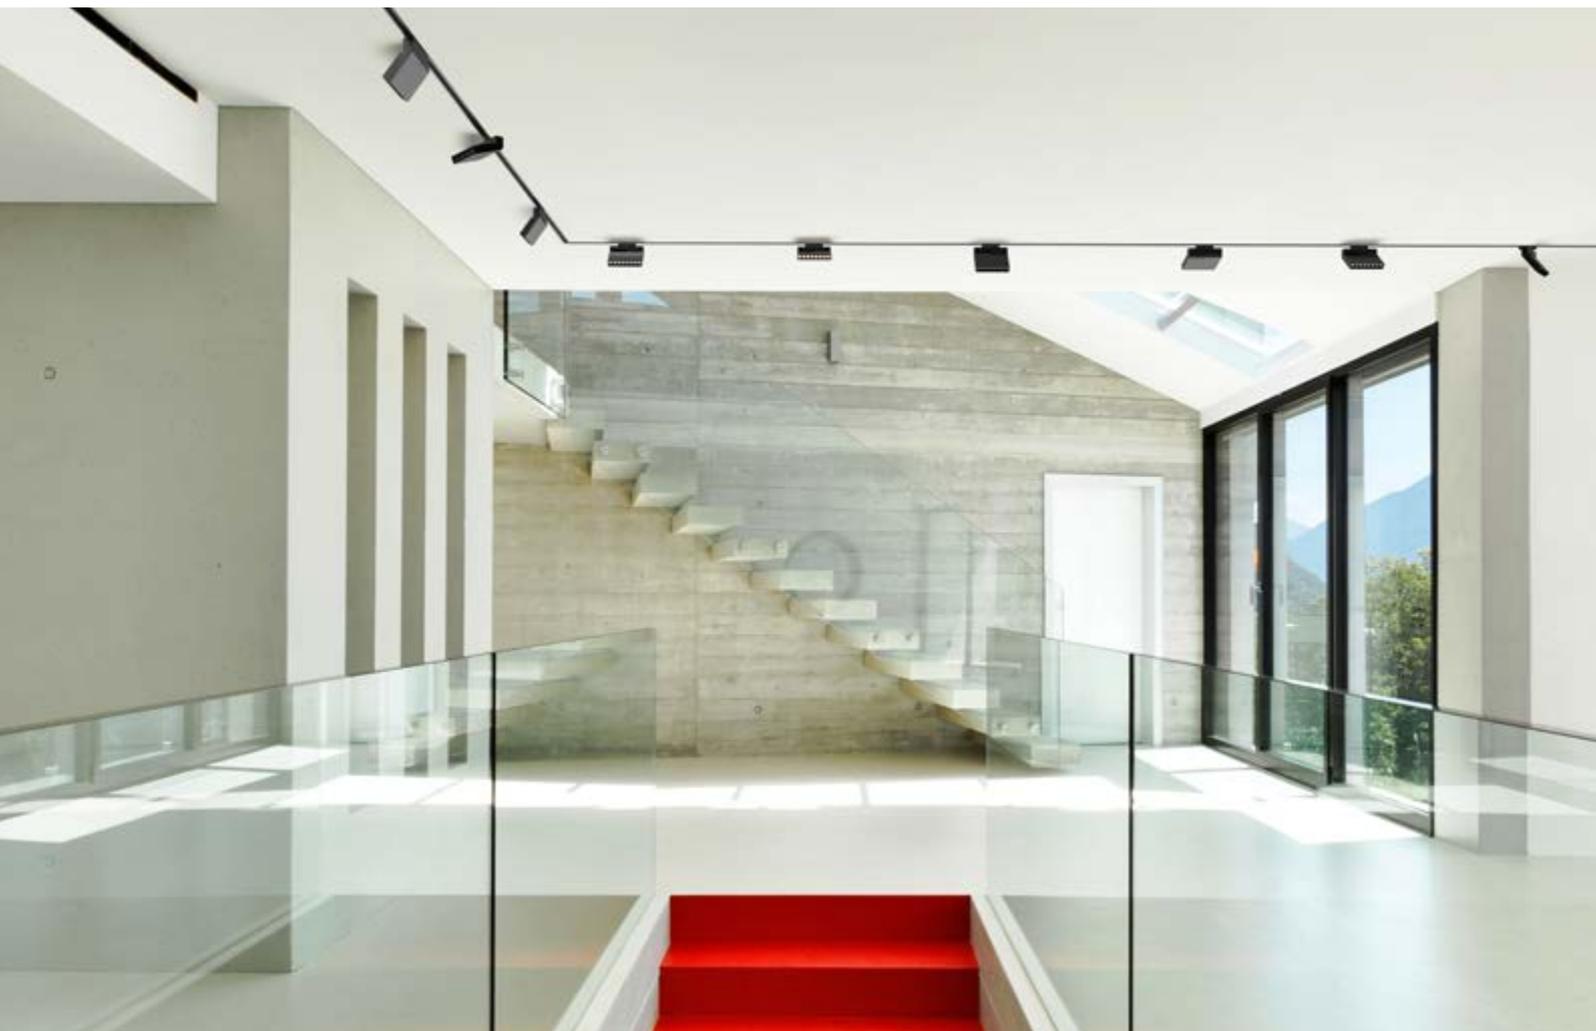


- Perfect for galleries, commercial spaces and homes with high ceilings, this powerful track light combines efficiency with light quality, washing spaces with brilliant Tru-Colour illumination.

W2000 H Fixed Linear LED wall light



Electrical:	Circuit Wattage: 26W	Delivered Light Efficacy: 77-78lm/W	Dimming: Phase Dimming (Standard) DALI (special order)	Longevity: L70 B10 = 50,000 Hrs L50 = 80,000 Hrs
Optical:	Delivered Lumens: 2000-2040lm	Colour Temperature: 3000K (3K) 4000K (4K) 2700K (2.7K) (special order) 5000K (5K) (special order)	Beam Angle: Diffused - 180° (DF180)	Tru-Colour: Yes
Physical:	Hole Cutout: 20mm	Gimbal Angle: N/A	Warranty: 7 years of luminaire warranty & 5 years of driver warranty	IP Rating: IP44
	Type: Wall light	Body Colour: <input type="radio"/> White (W) <input checked="" type="radio"/> Black (B)	Fascia Colour: N/A	Fascia Style: N/A

Photometrics:



Dimensions:



Specifying Product:

<u>Product Name</u>	<u>Family</u>	<u>Colour Temp.</u>	<u>Beam Angle</u>	<u>Body Colour</u>	<u>Version No.</u>	<u>Eg. Product Code</u>
W2000.H	LN	3K 4K	DF180	White Black	2.0	W2000.H-LN-3K-DF180-W-2.0




- Create interest and atmosphere in your interior with the W2000 H Linear wall light. Its dual projection creates ambience, washing mounting surfaces with diffused, Tru-Colour illumination . Placing this light below eye height creates the same sense of calm and visual interest that is normally achieved with table lamps.

R7 Custom Linear Strip LED recessed


Electrical:	Lamp Wattage:	Source Lamp Efficacy:	Dimming:	Longevity:
	10W/m	74lm/W (3000K) 76lm/W (4000K)	Non-Dimmable [ND] Phase Dimming (Digital Driver Standard) DALI [DALI] 0-10V [010V]	L70 B10 = 50,000 Hrs L50 = 80,000 Hrs
Optical:	Source Lumens:	Colour Temperature:	Beam Angle:	Tru-Colour:
	710lm/m (3000K) 730lm/m (4000K)	3000K (3K) 4000K (4K) 2700K (2.7K) (special order) 5000K (5K) (special order)	Diffused - 180° (DF180)	Yes
Physical:	Hole Cutout:	Gimbal Angle:	Warranty:	IP Rating:
	7mm X xx	N/A	7 years of luminaire warranty & 5 years of driver warranty	IP44
	Type:	Body Colour:	Fascia Colour:	Fascia Style:
	Recessed	<input type="radio"/> White (W)	N/A	N/A

Dimensions:

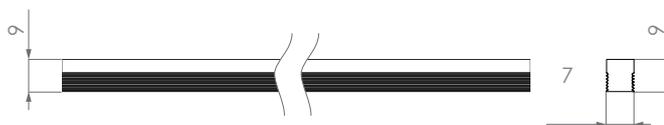

Standard Length: 2.5m
Also Available in Custom Lengths

Photometrics:



Specifying Product:	Product		Lamp Wattage	Colour Temp.	Beam Angle	Body Colour	Driver	Eg. Product Code
	Name	Length						
	R7	2.5m xx	LN	10Wm	3K 4K	White	ND PHASE DALI 010V	R7.2.5m-LN-7Wm-3K-DF180-W-ND

- Perfect for accenting architectural features, this super slimline LED profile light can be cut to size and inlaid into stairs or any surface to provide customised orientation lighting.



R40 Custom Linear Strip LED recessed




Electrical:	Lamp Wattage:	Source Lamp Efficacy:	Dimming:	Longevity:
	10W/m 20W/m 30W/m	89lm/W (3000K) 91lm/W (4000K)	Non-Dimmable [ND] Phase Dimming (Digital Driver Standard) DALI [DALI] 0-10V [010V]	L70 : 10w/m = 100000 hrs 20w/m = 80000 hrs 30w/m = 50000 hrs

Optical:	Source Lumens:	Colour Temperature:	Beam Angle:	Tru-Colour:
	800lm/m (3000K) 815lm/m (4000K) 1600lm/m (3000K) 1630lm/m (4000K) 2660lm/m (3000K) 2715lm/m (4000K)	3000K (3K) 4000K (4K) 2700K (2.7K) (special order) 5000K (5K) (special order)	Wide flood - 60° (WF60) Asymmetrical-40° (AS40) Batwing - 40/40° (BW40) Diffused - 180° (DF180)	Yes


Physical:	Hole Cutout:	Gimbal Angle:	Warranty:	IP Rating:
	45mm X xx	N/A	7 years of luminaire warranty & 5 years of driver warranty	IP44
	Type:	Outer Colour:	Inner Colour:	Fascia Style:
	Recessed	<ul style="list-style-type: none"> ● Black (BO) ● Silver (SO) ● White (WO) 	<ul style="list-style-type: none"> ● Black (BI) ● Silver (SI) 	N/A

Dimensions:

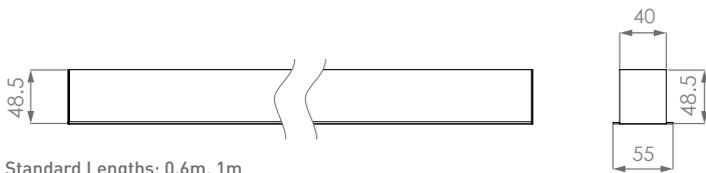

Standard Lengths: 0.6m, 1m
Also Available in Custom Lengths

Photometrics:

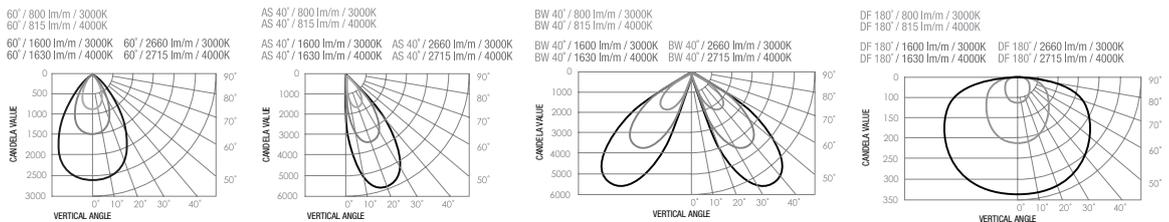

Specifying Product:

Product Name	Length	Family	Lamp Wattage	Colour Temp.	Beam Angle	Colour	Driver	Eg. Product Code
R40	0.6m 1.0m xx	LN	10Wm	3K	AS40	BO, BI	ND	R40.1.0m-LN-10Wm-3K-WF60-BO, BI-ND
			20Wm	4K	WF60	BO, SI	PHASE	
			30Wm	BW40	SO, BI	DALI		
				DF180	SO, SI	010V		
				WO, BI WO, SI				




- The R40 Linear allows you to get creative with our range of joining accessories to customise unique designs in nearly any shape. Use the range of lens options to reduce glare and minimise the visual impact of the light source for targeted illumination on surfaces or wash walls.

R70 Custom Linear Strip LED recessed




Electrical:	Lamp Wattage: 10W/m 20W/m 30W/m	Source Lamp Efficacy: 89lm/W (3000K) 91lm/W (4000K)	Dimming: Non-Dimmable [ND] Phase Dimming (Digital Driver Standard) DALI [DALI] 0-10V [010V]	Longevity: L70 : 10w/m = 100000 hrs 20w/m = 80000 hrs 30w/m = 50000 hrs
Optical:	Source Lumens: 800lm/m (3000K) 815lm/m (4000K) 1600lm/m (3000K) 1630lm/m (4000K) 2660lm/m (3000K) 2715lm/m (4000K)	Colour Temperature: 3000K [3K] 4000K [4K] 2700K [2.7K] (special order) 5000K [5K] (special order)	Beam Angle: Wide flood - 60° (WF60) Asymmetrical-40° (AS40) Batwing - 40/40° (BW40) Diffused - 180° (DF180)	Tru-Colour: Yes
Physical:	Hole Cutout: 75mm X xx	Gimbal Angle: N/A	Warranty: 7 years of luminaire warranty & 5 years of driver warranty	IP Rating: IP44
	Type: Recessed	Outer Colour: ● Black (BO) ● Silver (SO) ● White (WO)	Inner Colour: ● Black (BI) ● Silver (SI)	Fascia Style: N/A

Dimensions:

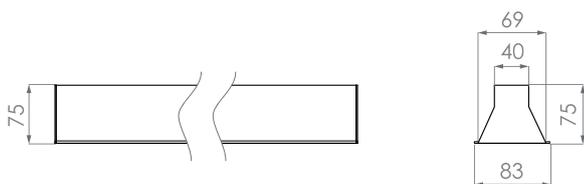

Available in Custom Lengths

Photometrics:

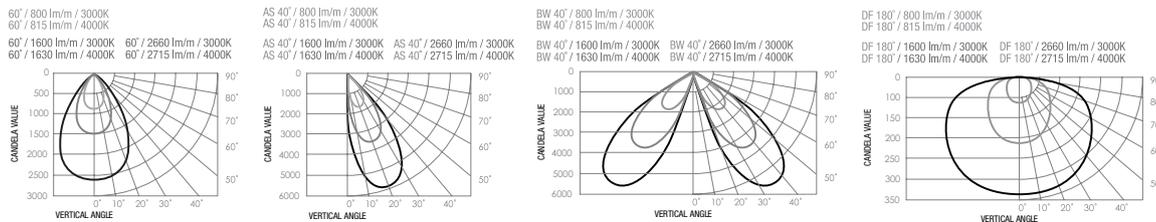

Specifying Product:

Product Name	Length	Family	Lamp Wattage	Colour Temp.	Beam Angle	Colour	Driver	Eg. Product Code
R70	xx	LN	10Wm	3K	AS40	BO.BI	ND	R70.xx-LN-10Wm-3K-WF60-BO.BI-ND
			20Wm	4K	WF60	BO.SI	PHASE	
			30Wm		BW40	SO.BI	DALI	
					DF180	SO.SI	010V	
						WO.BI		
						WO.SI		




- This wide-bodied recessed design provides efficiency and Tru-Colour light quality at a scale to suit larger spaces that require higher levels of brightness. The R70 is available for order in custom lengths so you can customise your lighting design to suit your project perfectly.

S7 Custom Linear Strip LED surface


Electrical:	Lamp Wattage:	Source Lamp Efficacy:	Dimming:	Longevity:
	10W/m	74lm/W (3000K) 76lm/W (4000K)	Non-Dimmable [ND] Phase Dimming (Digital Driver Standard) DALI [DALI] 0-10V [010V]	L70 B10 = 50,000 Hrs L50 = 80,000 Hrs
Optical:	Source Lumens:	Colour Temperature:	Beam Angle:	Tru-Colour:
	710lm/m (3000K) 730lm/m (4000K)	3000K (3K) 4000K (4K) 2700K (2.7K) (special order) 5000K (5K) (special order)	Diffused - 180° (DF180)	Yes
Physical:	Hole Cutout:	Gimbal Angle:	Warranty:	IP Rating:
	N/A	N/A	7 years of luminaire warranty & 5 years of driver warranty	IP44
	Type:	Body Colour:	Fascia Colour:	Fascia Style:
	Surface-mounted	<input type="radio"/> White (W)	N/A	N/A

Dimensions:



Standard Length: 2.5m
Also Available in Custom Lengths

Photometrics:



Specifying Product:	Product Name	Length	Family	Lamp Wattage	Colour Temp.	Beam Angle	Body Colour	Driver	Eg. Product Code
		S7	2.5m xx	LN	10Wm	3K 4K	DF180	White	ND PHASE DALI 010V




- Create efficient task lighting for kitchen benches using the easy-to-install, S7 Linear surface-mounted design.

S40 Custom Linear Strip LED surface




Electrical:	Lamp Wattage: 10W/m 20W/m 30W/m	Source Lamp Efficacy: 89lm/W (3000K) 91lm/W (4000K)	Dimming: Non-Dimmable [ND] Phase Dimming (Digital Driver Standard) DALI [DALI] 0-10V [010V]	Longevity: L70 : 10w/m = 100000 hrs 20w/m = 80000 hrs 30w/m = 50000 hrs
Optical:	Source Lumens: 800lm/m (3000K) 815lm/m (4000K) 1600lm/m (3000K) 1630lm/m (4000K) 2660lm/m (3000K) 2715lm/m (4000K)	Colour Temperature: 3000K (3K) 4000K (4K) 2700K (2.7K) (special order) 5000K (5K) (special order)	Beam Angle: Wide flood - 60° (WF60) Asymmetrical - 40° (AS40) Batwing - 40/40° (BW40) Diffused - 180° (DF180)	Tru-Colour: Yes
Physical:	Hole Cutout: N/A	Gimbal Angle: N/A	Warranty: 7 years of luminaire warranty & 5 years of driver warranty	IP Rating: IP44
	Type: Surface-mounted	Outer Colour: ● Black [BO] ● Silver [SO] ● White [WO]	Inner Colour: ● Black [BI] ● Silver [SI]	Fascia Style: N/A

Dimensions:

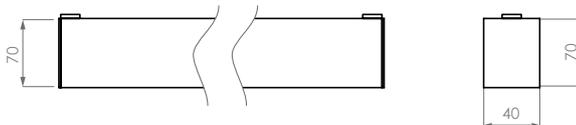

Standard Lengths: 1.2m, 1.5m, 2.0m, 2.4m, 3m
Also Available in Custom Lengths

Photometrics:

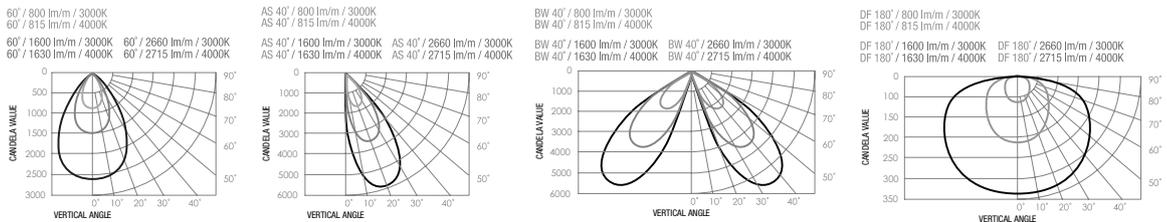

Specifying Product:

Product Name	Length	Family	Lamp Wattage	Colour Temp.	Beam Angle	Colour	Driver	Eg. Product Code
S40	1.2m	LN	10Wm	3K	WF60	BO.BI	ND	S40.3.0m-LN-10Wm-3K-WF60-BO.BI-ND
	1.5m		20Wm	4K	AS40	BO.SI	PHASE	
	2.0m		30Wm		BW40	SO.BI	DALI	
	2.4m				DF180	SO.SI	010V	
	3.0m					WO.BI		
	xx					WO.SI		




- From a broad beam lens for general illumination, to a unique bat-winged lens for lighting that emits from both sides of the fitting, the S40 Linear can be cut and customised using a variety of lenses to achieve limitless lighting effects.

S70 Custom Linear Strip LED surface




Electrical:	Lamp Wattage: 10W/m 20W/m 30W/m	Source Lamp Efficacy: 89lm/W (3000K) 91lm/W (4000K)	Dimming: Non-Dimmable [ND] Phase Dimming (Digital Driver Standard) DALI [DALI] 0-10V [010V]	Longevity: L70 : 10w/m = 100000 hrs 20w/m = 80000 hrs 30w/m = 50000 hrs
Optical:	Source Lumens: 800lm/m (3000K) 815lm/m (4000K) 1600lm/m (3000K) 1630lm/m (4000K) 2660lm/m (3000K) 2715lm/m (4000K)	Colour Temperature: 3000K [3K] 4000K [4K] 2700K [2.7K] (special order) 5000K [5K] (special order)	Beam Angle: Wide flood - 60° [WF60] Asymmetrical-40° [AS40] Batwing - 40/40° [BW40] Diffused - 180° [DF180]	Tru-Colour: Yes
Physical:	Hole Cutout: N/A	Gimbal Angle: N/A	Warranty: 7 years of luminaire warranty & 5 years of driver warranty	IP Rating: IP44
	Type: Surface-mounted	Outer Colour: ● Black [B0] ● Silver [SO] ● White [WO]	Inner Colour: ● Black [BI] ● Silver [SI]	Fascia Style: N/A

Dimensions:

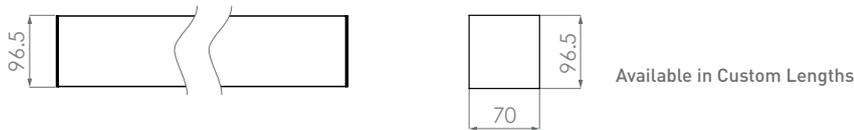

Photometrics:

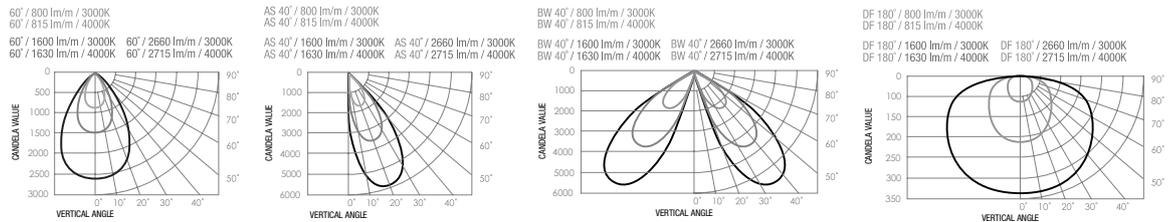

Specifying Product:

Product Name	Length	Family	Lamp Wattage	Colour Temp.	Beam Angle	Colour	Driver	Eg. Product Code
S70	xx	LN	10Wm	3K	AS40	B0.BI	ND	S70.xx-LN-10Wm-3K-WF60-B0.BI-ND
			20Wm	4K	WF60	B0.SI	PHASE	
			30Wm		BW40	S0.BI	DALI	
					DF180	S0.SI	010V	
						WO.BI		
						WO.SI		




- Available in either black or white and with a variety of different lenses, the S70 Linear surface-mounted design is ideal for installation on hard-to-cut surfaces like concrete.

S10 X Custom Linear Strip LED surface




Electrical:	Lamp Wattage:	Delivered Lamp Efficacy:	Dimming:	Longevity:
	10W/m	41lm/W (3000K) 43lm/W (4000K)	Non-Dimmable (ND)* Phase Dimming (Digital Driver Standard)* DALI (DALI)* 0-10(010V)* *Drivers sold separately. Please select from pg136	50,000 Hrs L50 = 80,000 Hrs
Optical:	Delivered Lumens:	Colour Temperature:	Beam Angle:	Tru-Colour:
	410lm/m (3000K) 425lm/m (4000K)	3000K (3K) 4000K (4K) 2700K (2.7K) (special order) 5000K (5K) (special order)	Diffused - 180° (DF180)	Yes
Physical:	Hole Cutout:	Gimbal Angle:	Warranty:	IP Rating:
	N/A	N/A	7 years of luminaire warranty	IP67
	Type:	Body Colour:	Fascia Colour:	Fascia Style:
	Strip Light	<input type="radio"/> White (W)	N/A	N/A

Dimensions:

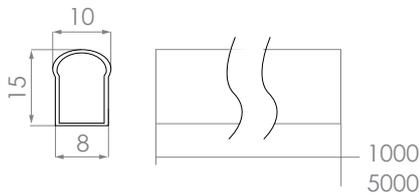

Photometrics:

DF180° / 410 lm / 3000K




Specifying Product:	Product Name	Length	Family	Colour Temp.	Beam Angle	Body Colour	Eg. Product Code
	S10.X	1.0m 5.0m	LN	3K 4K	DF180	White	S10.X.1.0m-LN-3K-DF180-W

•The S10.X introduces a new kind of flexible to our lighting solutions. Completely custom lengths, unseen flexibility, dimming compatibility, weather-proof and effortless installation make S10.X the solution that bends itself to your needs.



P40 Custom Linear Strip LED pendant

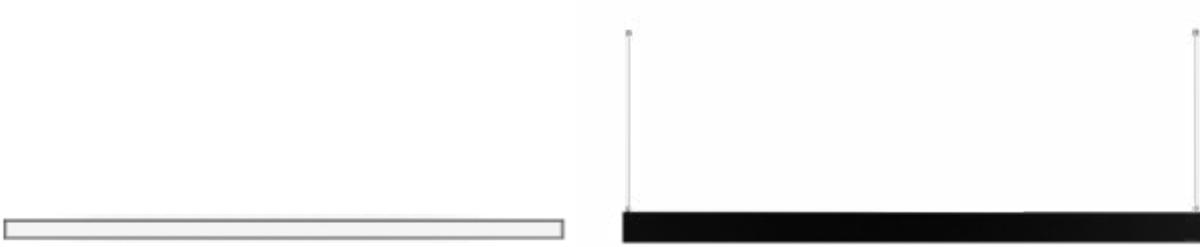


Electrical:	Lamp Wattage: 10W/m 20W/m 30W/m	Source Lamp Efficacy: 89lm/W (3000K) 91lm/W (4000K)	Dimming: Non-Dimmable [ND] Phase Dimming (Digital Driver Standard) DALI [DALI] 0-10V [010V]	Longevity: L70 : 10w/m = 100000 hrs 20w/m = 80000 hrs 30w/m = 50000 hrs
--------------------	---	--	---	--

Optical:	Source Lumens: 800lm/m (3000K) 815lm/m (4000K) 1600lm/m (3000K) 1630lm/m (4000K) 2660lm/m (3000K) 2715lm/m (4000K)	Colour Temperature: 3000K (3K) 4000K (4K) 2700K (2.7K) (special order) 5000K (5K) (special order)	Beam Angle: Wide flood - 60° (WF60) Asymmetrical- 40° (AS40) Batwing - 40/40° (BW40) Diffused - 180° (DF180)	Tru-Colour: Yes
			Optional: Uplight-DF180	

Physical:	Hole Cutout: N/A	Gimbal Angle: N/A	Warranty: 7 years of luminaire warranty & 5 years of driver warranty	IP Rating: IP44
------------------	----------------------------	-----------------------------	--	---------------------------


Type: Pendant	Outer Colour: ● Black (BO) ● Silver (SO) ● White (WO)	Inner Colour: ● Black (BI) ● Silver (SI)	Fascia Style: N/A
-------------------------	---	---	-----------------------------

Dimensions:

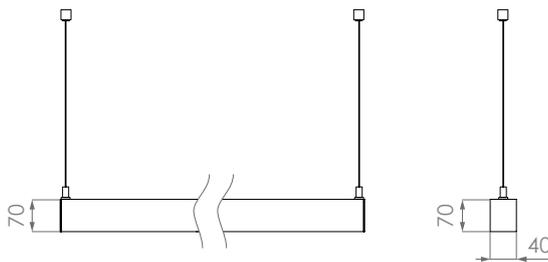

Standard Lengths: 1.2m, 1.5m, 2.0m, 2.4m, 3.0m
Also Available in Custom Lengths

Photometrics:

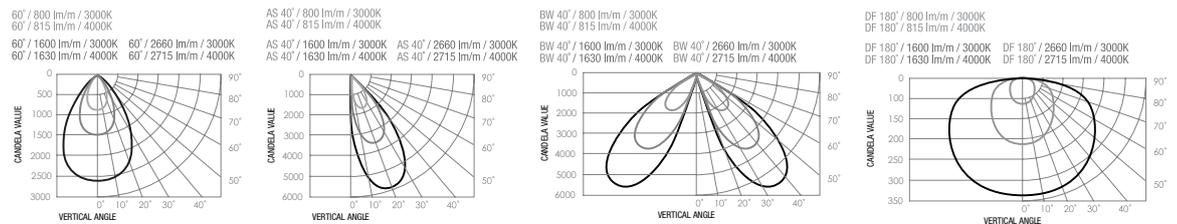


Specifying Product:

Product Name	Length	Family	Lamp Wattage	Colour Temp.	Beam Angle	Colour	Driver	Eg. Product Code
P40	1.2m,	LN	10Wm	3K	WF60	BO.BI	ND	P40.3.0m-LN-10Wm-3K-WF60-BO.BI-ND
	1.5m,		20Wm	4K	AS40	BO.SI	PHASE	
	2.0m,		30Wm	BW40	SO.BI	DALI		
	2.4m,		DF180	SO.SI	010V			
	3.0m,		WO.BI					
	xx		WO.SI					




- Create a one-of-a-kind feature pendant using the P40 Linear. This fitting can be ordered in the exact lengths that your space requires and connected to create a variety of shapes.

P70 Custom Linear Strip LED pendant

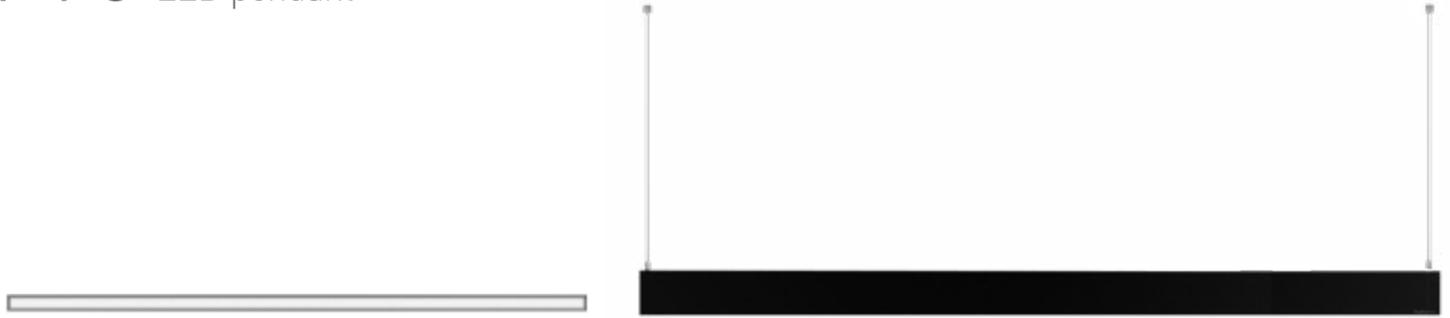


Electrical:	Lamp Wattage: 10W/m 20W/m 30W/m	Source Lamp Efficacy: 89lm/W (3000K) 91lm/W (4000K)	Dimming: Non-Dimmable [ND] Phase Dimming [Digital Driver Standard] DALI [DALI] 0-10V [010V]	Longevity: L70 : 10w/m = 100000 hrs 20w/m = 80000 hrs 30w/m = 50000 hrs
Optical:	Source Lumens: 800lm/m (3000K) 815lm/m (4000K) 1600lm/m (3000K) 1630lm/m (4000K) 2660lm/m (3000K) 2715lm/m (4000K)	Colour Temperature: 3000K (3K) 4000K (4K) 2700K (2.7K) (special order) 5000K (5K) (special order)	Beam Angle: Wide flood - 60° [WF60] Asymmetrical-40° [AS40] Batwing - 40/40° [BW40] Diffused - 180° [DF180]	Tru-Colour: Yes
Physical:	Hole Cutout: N/A	Gimbal Angle: N/A	Warranty: 7 years of luminaire warranty & 5 years of driver warranty	IP Rating: IP44
	Type: Pendant	Outer Colour: ● Black (BO) ● Silver (SO) ● White (WO)	Inner Colour: ● Black (BI) ● Silver (SI)	Fascia Style: N/A

Dimensions:

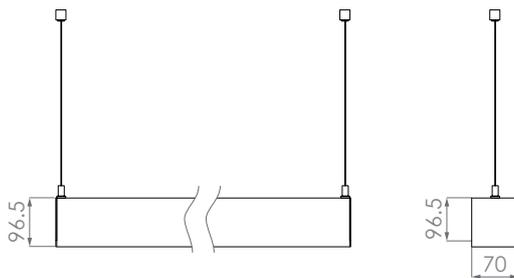


Available in Custom Lengths

Photometrics:

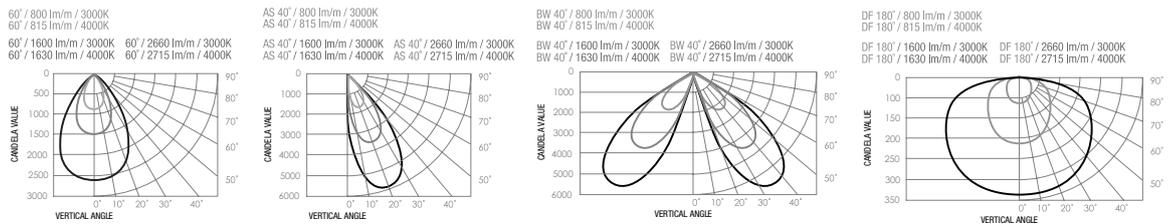

Specifying Product:

Product Name	Length	Family	Lamp Wattage	Colour Temp.	Beam Angle	Colour	Driver	Eg. Product Code
P70	xx	LN	10Wm	3K	AS40	BO.BI	ND	P70.xx-LN-10Wm-3K-WF60-BO.BI-ND
			20Wm	4K	WF60	BO.SI	PHASE	
			30Wm		BW40	SO.BI	DALI	
					DF180	SO.SI	010V	
						WO.BI		
						WO.SI		

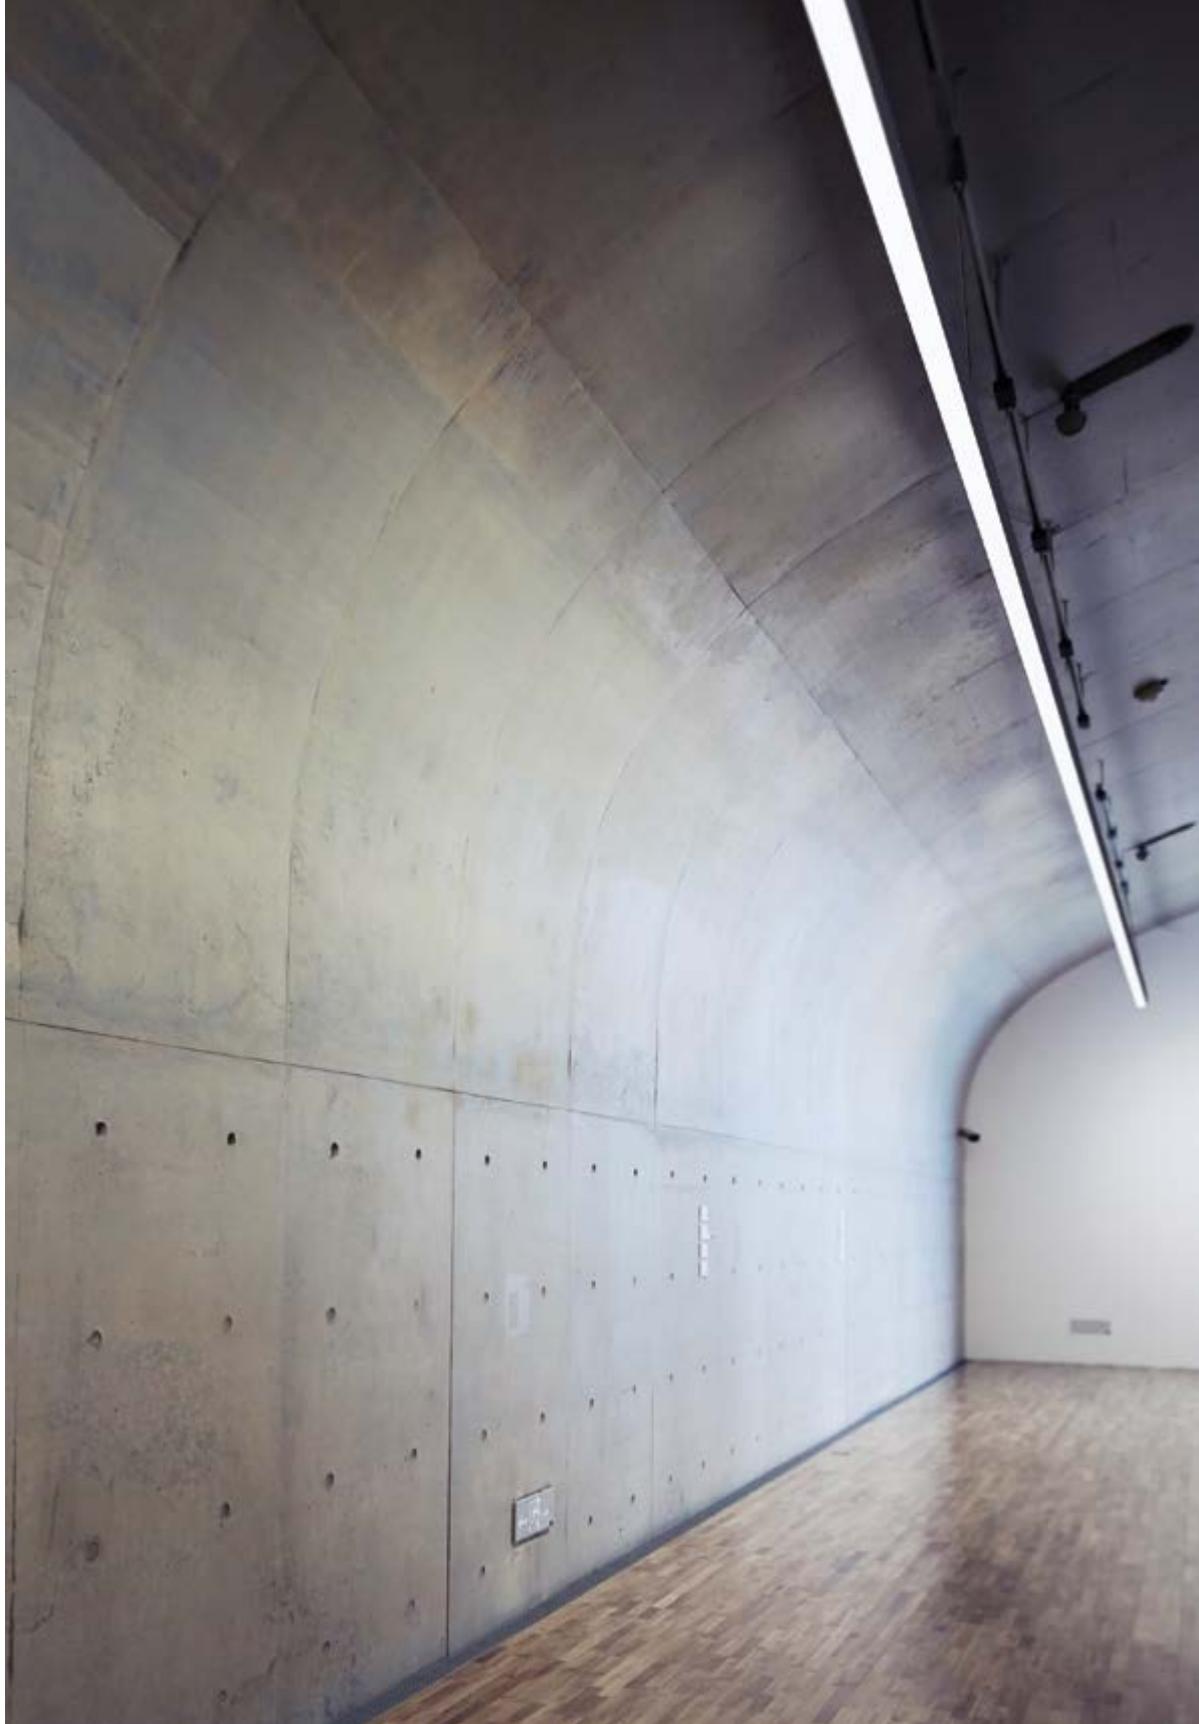


- The P70 Linear pendant provides the brightness options required for illuminating larger interior spaces in a stylishly simple fitting. Create your own customised feature light using our range of connectors and lenses for direct or diffuse lighting.

SH44 Custom Linear Strip LED wall light




Electrical:	Lamp Wattage: 10W/m 20W/m 30W/m	Source Lamp Efficacy: 93lm/W (3000K) 95lm/W (4000K)	Dimming: Non-Dimmable [ND] Phase Dimming (Digital Driver Standard) DALI [DALI] 0-10V [010V]	Longevity: L70 B10 = 50,000 Hrs L50 = 80,000 Hrs
Optical:	Source Lumens: 1680lm/m (3000K) 1715lm/m (4000K) 3360lm/m (3000K) 3430lm/m (4000K)	Colour Temperature: 3000K (3K) 4000K (4K) 2700K (2.7K) (special order) 5000K (5K) (special order)	Beam Angle: Diffused - 180° (DF180)	Tru-Colour: Yes
Physical:	Hole Cutout: N/A	Gimbal Angle: N/A	Warranty: 7 years of luminaire warranty & 5 years of driver warranty	IP Rating: IP44
	Type: Surface-mounted	Body Colour: ● Black (B) ○ White (W)	Fascia Colour: N/A	Fascia Style: N/A

Dimensions:

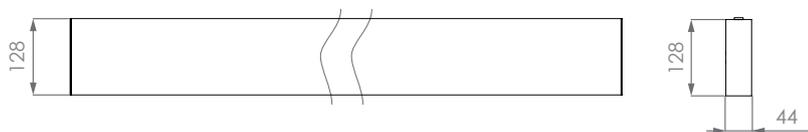

Standard Length: 2.5m
Also Available in Custom Lengths

Photometrics:



Specifying Product:

Product Name	Length	Family	Lamp Wattage	Colour Temp.	Beam Angle	Body Colour	Driver	Eg. Product Code
SH44	2.5m	LN	10Wm	3K	DF180	Black	ND	SH44.2.5m-LN-18Wm-3K-DF180-B-ND
	xx		20Wm	4K		White	PHASE	
			30Wm				DALI	
							010V	

- Projecting light in two directions, this versatile linear design washes its mounting surface with brilliant Tru-Colour illumination. Ideal for creating indirect ambient lighting, the SH44 can be mounted to walls or the ceiling.





CH15 Custom Linear Strip LED cabinet light



Electrical:	Lamp Wattage: 7W/m	Source Lamp Efficacy: 103lm/W (3000K) 105lm/W (4000K)	Dimming: Non-Dimmable [ND]	Longevity: L70 B10 = 50,000 Hrs L50 = 80,000 Hrs
Optical:	Source Lumens: 720lm/m (3000K) 735lm/m (4000K)	Colour Temperature: 3000K (3K) 4000K (4K) 2700K (2.7K) (special order) 5000K (5K) (special order)	Beam Angle: Diffused - 120° (DF120)	Tru-Colour: Yes
Physical:	Hole Cutout: N/A	Gimbal Angle: N/A	Warranty: 7 years of luminaire warranty & 5 years of driver warranty	IP Rating: IP40
	Type: Cabinet	Body Colour: ● Silver (S)	Fascia Colour: N/A	Fascia Style: N/A


Dimensions:

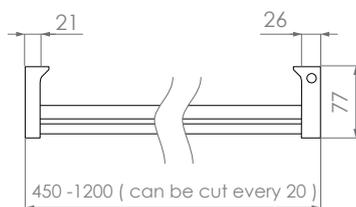


Standard Length: 1.2m
Also Available in Custom Lengths (max. 1.2m)

Photometrics:

DF120° / 720 lm / 3000K



DF120° / 735 lm / 4000K



Specifying Product:

Product Name	Length	Family	Lamp Wattage	Colour Temp.	Beam Angle	Body Colour	Driver	Eg. Product Code
CH15	1.2m xx	LN	7Wm	3K 4K	DF120	Silver	ND	CH15.1.2m-LN-7Wm-3K-DF120-S-ND



• Available in custom lengths up to 1200mm to suit various wardrobe sizes, the CH15 Linear clothes hanger allows you to illuminate your wardrobe in a practical and creative way.





LINEAR

CUBE

CURVE

ACCESSORIES




D550 Cube LED recessed




Electrical:	Circuit Wattage: 8.5W	Delivered Light Efficacy: 58-59lm/W	Dimming: Phase Dimming (Standard) DALI (special order)	Longevity: L70 B10 = 70,000 Hrs L50 = 110,000 Hrs
Optical:	Delivered Lumens: 495-505lm	Colour Temperature: 3000K (3K) 4000K (4K) 2700K (2.7K) (special order) 5000K (5K) (special order)	Beam Angle: 36°	Tru-Colour: Yes
Physical:	Hole Cutout: 64mm circular	Gimbal Angle: Universal (17° Tilt)	Warranty: 7 years of luminaire warranty & 5 years of driver warranty	IP Rating: IP44
	Type: Downlight	Body Colour: <input type="radio"/> White <input checked="" type="radio"/> Black	Fascia Colour: <input type="radio"/> White (W) <input checked="" type="radio"/> Black (B)	Fascia Style: N/A

Photometrics:



Dimensions:

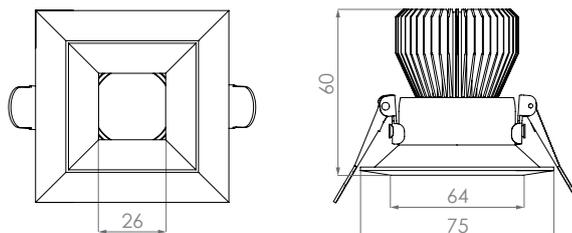

Specifying Product:	Product Name	Family	Colour Temp.	Beam Angle	Fascia/Body Colour	Version No.	Eg. Product Code
	D550	CB	3K 4K	36°	White Black	1.0	D550-CB-3K-36-W-1.0

•Projecting 505 lumens, the petite yet powerful D550 Cube is perfect for lighting up smaller hard-to-reach spaces and accenting interior features, artwork and alcoves.





D700 Cube LED recessed





Electrical:	Circuit Wattage: 10.6W	Delivered Light Efficacy: 64-65lm/W	Dimming: Phase Dimming (Standard) DALI (special order)	Longevity: L70 B10 = 70,000 Hrs L50 = 110,000 Hrs
Optical:	Delivered Lumens: 680-695lm	Colour Temperature: 3000K (3K) 4000K (4K) 2700K (2.7K) (special order) 5000K (5K) (special order)	Beam Angle: 55° 20° (special order) 35° (special order)	Tru-Colour: Yes
Physical:	Hole Cutout: 92mm circular	Gimbal Angle: Universal (17° Tilt)	Warranty: 7 years of luminaire warranty & 5 years of driver warranty	IP Rating: IP44
	Type: Downlight	Body Colour: <input type="radio"/> White <input checked="" type="radio"/> Black	Fascia Colour: <input type="radio"/> White (W) <input checked="" type="radio"/> Black (B)	Fascia Style: N/A

Photometrics:



Dimensions:



Specifying Product:	Product Name	Family	Colour Temp.	Beam Angle	Fascia/Body Colour	Version No.	Eg. Product Code
	D700	CB	3K 4K	55°	White Black	1.0	D700-CB-3K-55-W-1.0




• Similar to its larger counterpart, the D900 Cube, this downlight projects a square beam designed to maximise efficiency by avoiding overlapping beams. With a light output of 715 lumens making it ideal for general illumination, the D700 Cube can be used to delineate spaces in open plan living areas by aligning its straight-edged beam where you would like to create a visual division.

D900 Cube LED recessed




Electrical:	Circuit Wattage: 13.3W	Delivered Light Efficacy: 70-71lm/W	Dimming: Phase Dimming (Standard) DALI (special order)	Longevity: L70 B10 = 70,000 Hrs L50 = 110,000 Hrs
Optical:	Delivered Lumens: 930-950lm	Colour Temperature: 3000K (3K) 4000K (4K) 2700K (2.7K) (special order) 5000K (5K) (special order)	Beam Angle: 55°	Tru-Colour: Yes
Physical:	Hole Cutout: 92mm circular	Gimbal Angle: Universal (17° Tilt)	Warranty: 7 years of luminaire warranty & 5 years of driver warranty	IP Rating: IP44
	Type: Downlight	Body Colour: <input type="radio"/> White <input checked="" type="radio"/> Black	Fascia Colour: <input type="radio"/> White (W) <input checked="" type="radio"/> Black (B)	Fascia Style: N/A

Photometrics:



Dimensions:

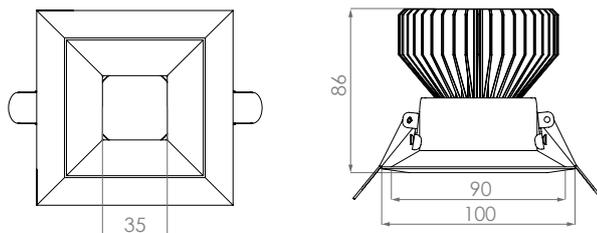


Specifying Product:	Product Name	Family	Colour Temp.	Beam Angle	Fascia/Body Colour	Version No.	Eg. Product Code
	D900	CB	3K 4K	55°	White Black	3.0	D900-CB-3K-55-W-3.0




- The third-generation of the world's first square-beamed LED downlight illuminates spaces with control and efficiency. The unique light projection of this design aligns with the straight edges of rooms to eliminate overlapping and dark spots. Its 910 lumen output makes it perfect for task lighting.

W200 Cube LED wall light

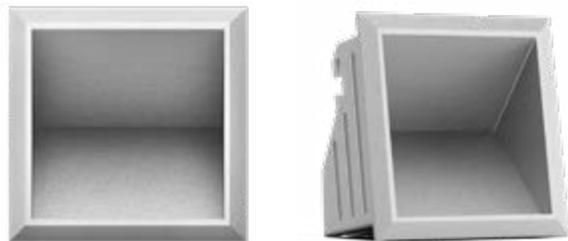


Electrical:	Circuit Wattage: 5W	Delivered Light Efficacy: 40lm/W	Dimming: Phase Dimming (Standard) DALI (special order)	Longevity: L70 B10 = 70,000 Hrs L50 = 110,000 Hrs
Optical:	Delivered Lumens: 200lm	Colour Temperature: 3000K (3K) 2700K (2.7K) (special order) 5000K (5K) (special order)	Beam Angle: 90/75°	Tru-Colour: Yes
Physical:	Hole Cutout: 64mm square	Gimbal Angle: N/A	Warranty: 7 years of luminaire warranty & 5 years of driver warranty	IP Rating: IP43
	Type: Wall light	Body Colour: N/A	Fascia Colour: ● White (W) ● Silver (S)	Fascia Style: N/A

Photometrics:

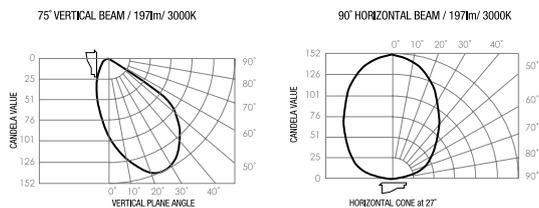

Dimensions:

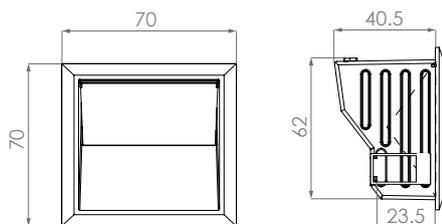


Specifying Product:	Product Name	Family	Colour Temp.	Beam Angle	Fascia/Body Colour	Version No.	Eg. Product Code
	W200	CB	3K	90/75°	White Silver	1.5	W200-CB-3K-90.75-W-1.5




- Create ambient orientation lighting in hallways and stairwells by installing a succession of W200 Cubes low to the ground. The adjustable paddle diffuser allows you to switch between soft glows and a more defined, trapezoid-shaped beam.

W900 Cube LED wall light

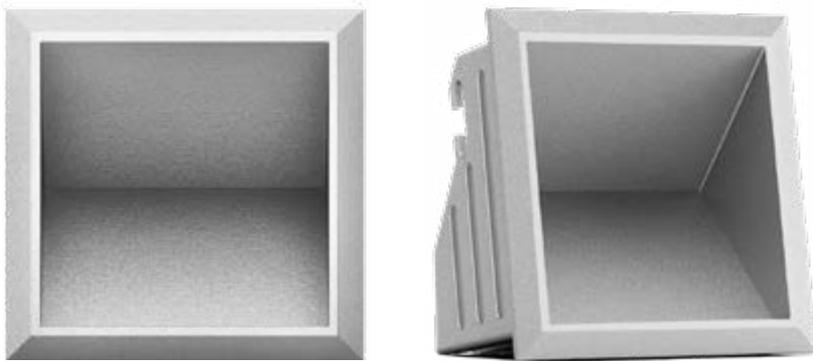


Electrical:	Circuit Wattage: 18W	Delivered Light Efficacy: 50lm/W	Dimming: Phase Dimming (Standard) DALI (special order)	Longevity: L70 B10 = 70,000 Hrs L50 = 110,000 Hrs
Optical:	Delivered Lumens: 900lm	Colour Temperature: 3000K (3K) 2700K (2.7K) (special order) 5000K (5K) (special order)	Beam Angle: 90/75°	Tru-Colour: Yes
Physical:	Hole Cutout: 138mm square	Gimbal Angle: N/A	Warranty: 7 years of luminaire warranty & 5 years of driver warranty	IP Rating: IP43
	Type: Wall light	Body Colour: N/A	Fascia Colour: <input type="radio"/> White (W) <input type="radio"/> Silver (S)	Fascia Style: N/A

Photometrics:

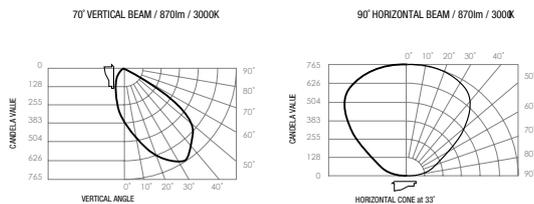

Dimensions:

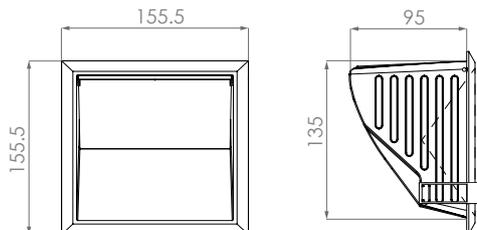

Specifying Product:	Product Name	Family	Colour Temp.	Beam Angle	Fascia/Body Colour	Version No.	Eg. Product Code
	W900	CB	3K	90/75°	White Silver	1.5	W900-CB-3K-90.75-W-1.5




- The efficient and versatile W900 Cube projects a trapezoid-shaped beam to fill spaces with ambient 3000K Tru-Colour Illumination. Use the adjustable paddle diffuser to switch between diffused and direct beams.

W200 SX Cube LED wall light




Electrical:	Circuit Wattage: 6W	Delivered Light Efficacy: 33lm/W	Dimming: DALI (special order) Non-dimmable (BG-030ND-830mA)*	Longevity: L70 B10 = 40,000 Hrs L50 = 65,000 Hrs
			*Drivers sold separately. Please select from pg136	
Optical:	Delivered Lumens: 200lm	Colour Temperature: 3000K (3K) 2700K (2.7K) (special order) 5000K (5K) (special order)	Beam Angle: 180°/20°	Tru-Colour: Yes
Physical:	Hole Cutout: 44mm	Gimbal Angle: 30° Universal	Warranty: 7 years of luminaire warranty	IP Rating: IP22
	Type: Wall light	Body Colour: N/A	Fascia Colour: ● White (W) ● Silver (S)	Fascia Style: N/A

Photometrics:

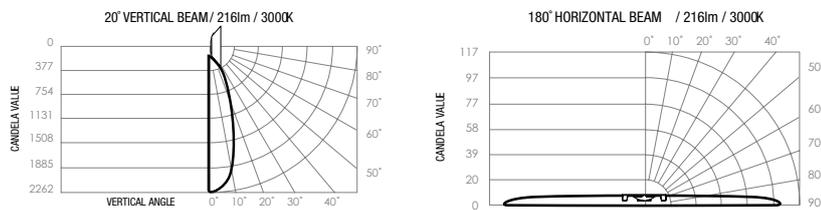

Dimensions:

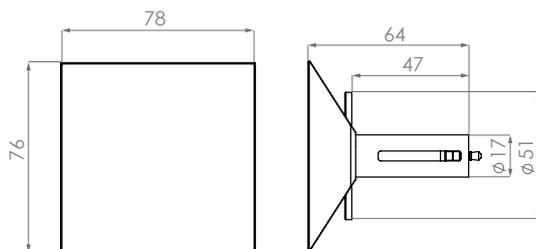

Specifying Product:	Product Name	Family	Colour Temp.	Beam Angle	Fascia/Body Colour	Version No.	Eg. Product Code
	W200.SX	CB	3K	180°/120°	White Silver	1.1	W200.SX-CB-3K-180.120-W-1.1




- The W200 SX Cube creates small square-beamed details across walls, creating interest and ambience on otherwise dull surfaces. The W200 SX Cube can be used in repetition to create lighting artworks that can be adjusted over time.

W900 SX ^{Cube} LED wall light




Electrical:	Circuit Wattage: 15W	Delivered Light Efficacy: 60lm/W	Dimming: DALI (special order) Non-dimmable (BG-030ND-830mA)* *Drivers sold separately. Please select from pg136	Longevity: L70 B10 = 40,000 Hrs L50 = 65,000 Hrs
Optical:	Delivered Lumens: 900lm	Colour Temperature: 3000K (3K) 2700K (2.7K) (special order) 5000K (5K) (special order)	Beam Angle: 180°/20°	Tru-Colour: Yes
Physical:	Hole Cutout: 44mm	Gimbal Angle: 20° Universal	Warranty: 7 years of luminaire warranty	IP Rating: IP22
	Type: Wall light	Body Colour: N/A	Fascia Colour: ● White (W) ● Silver (S)	Fascia Style: N/A

Photometrics:

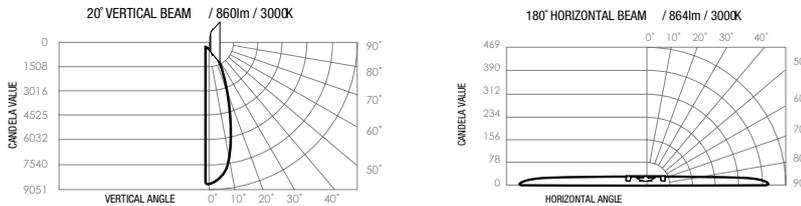

Dimensions:

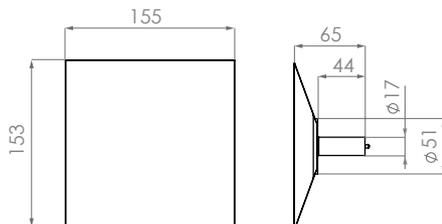


Specifying Product:	Product Name	Family	Colour Temp.	Beam Angle	Fascia/Body Colour	Version No.	Eg. Product Code
	W900.SX	CB	3K	180°/120°	White Silver	1.1	W900.SX-CB-3K-180.120-W-1.1

- Featuring a flexible mount, the W900 SX Cube can be repositioned over time, giving you the freedom to direct straight-edged, Tru-Colour beams across walls and neighbouring surfaces. Use it with its smaller counterpart, the W200 SX Cube, to create a unique feature wall.




W500 IPS Cube LED wall light

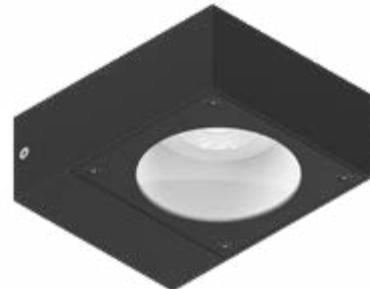


Electrical:	<u>Circuit Wattage:</u> 8.7W	<u>Delivered Light Efficacy:</u> 65lm/W	<u>Dimming:</u> No	<u>Longevity:</u> L70 = 70,000 Hrs
Optical:	<u>Delivered Lumens:</u> 570lm	<u>Colour Temperature:</u> 3000K (3K)	<u>Beam Angle:</u> 33°	<u>Tru-Colour:</u> Yes
Physical:	<u>Hole Cutout:</u> N/A	<u>Gimbal Angle:</u> N/A	<u>Warranty:</u> 3 years of luminaire warranty	<u>IP Rating:</u> IP54
	<u>Type:</u> Wall light	<u>Body Colour:</u> ● Black (B)	<u>Fascia Colour:</u> N/A	<u>Fascia Style:</u> N/A

Photometrics:



Dimensions:

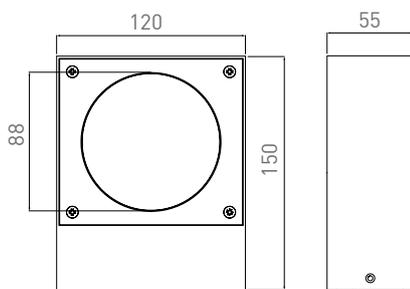


Specifying Product:	<u>Product Name</u> W500.IPS	<u>Family</u> CB	<u>Colour Temp.</u> 3K	<u>Beam Angle</u> 33°	<u>Body Colour</u> Black	<u>Version No.</u> 1.0	<u>Eg. Product Code</u> W500.IPS-CB-3K-33-W-1.0
----------------------------	---------------------------------	---------------------	---------------------------	--------------------------	-----------------------------	---------------------------	--




- W500 IPS-CB has a single directional integrated light source. Creates an up or down illumination best used for wall grazing or spotlighting a key area on the ground

W700 IPSH Cube LED wall light

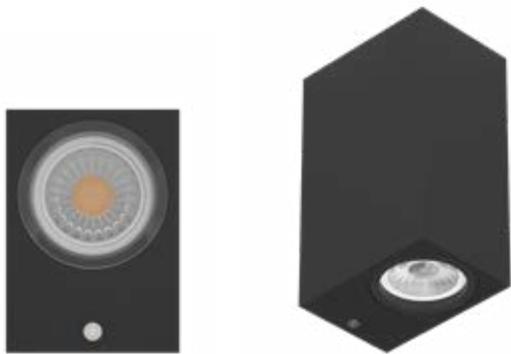


Electrical:	<u>Circuit Wattage:</u> 11.4W	<u>Delivered Light Efficacy:</u> 75lm/W	<u>Dimming:</u> No	<u>Longevity:</u> L70 = 70,000 Hrs
Optical:	<u>Delivered Lumens:</u> 855	<u>Colour Temperature:</u> 3000K (3K)	<u>Beam Angle:</u> 60°	<u>Tru-Colour:</u> Yes
Physical:	<u>Hole Cutout:</u> N/A	<u>Gimbal Angle:</u> N/A	<u>Warranty:</u> 3 years of luminaire warranty	<u>IP Rating:</u> IP65
	<u>Type:</u> Wall light	<u>Body Colour:</u> ● Black (B)	<u>Fascia Colour:</u> N/A	<u>Fascia Style:</u> N/A

Photometrics:



Dimensions:

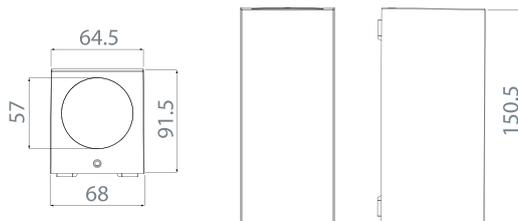

Specifying Product:	<u>Product Name</u> W700.IPSH	<u>Family</u> CB	<u>Colour Temp.</u> 3K	<u>Beam Angle</u> 60°	<u>Body Colour</u> Black	<u>Version No.</u> 1.0	<u>Eg. Product Code</u> W700.IPSH-CB-3K-60-B-1.0
----------------------------	----------------------------------	---------------------	---------------------------	--------------------------	-----------------------------	---------------------------	---

- W700 IPSH has a dual directional 60° beam light source. It features an up and down illumination used for wall grazing or spotlighting architectural designs.




W900 IPS Cube LED wall light




Electrical:	<u>Circuit Wattage:</u> 19.2W	<u>Delivered Light Efficacy:</u> 56lm/W	<u>Dimming:</u> No	<u>Longevity:</u> L70 = 70,000 Hrs
Optical:	<u>Delivered Lumens:</u> 1070lm	<u>Colour Temperature:</u> 3000K (3K)	<u>Beam Angle:</u> 110°	<u>Tru-Colour:</u> Yes
Physical:	<u>Hole Cutout:</u> N/A	<u>Gimbal Angle:</u> N/A	<u>Warranty:</u> 3 years of luminaire warranty	<u>IP Rating:</u> IP54
	<u>Type:</u> Wall light	<u>Body Colour:</u> ● Black (B)	<u>Fascia Colour:</u> N/A	<u>Fascia Style:</u> N/A

Photometrics:



Dimensions:

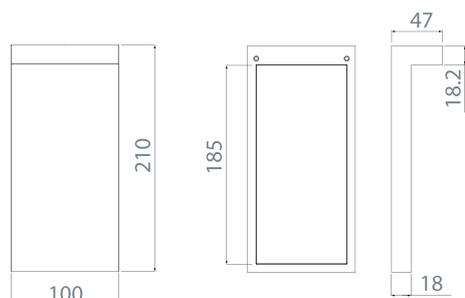


Specifying Product:	<u>Product Name</u>	<u>Family</u>	<u>Colour Temp.</u>	<u>Beam Angle</u>	<u>Body Colour</u>	<u>Version No.</u>	<u>Eg. Product Code</u>
	W900.IPS	CB	3K	110°	Black	1.0	W900.IPS-CB-3K-110-B-1.0




- W900 IPS-CB has a single integrated indirect soft light source with 110° beam angle. Light bounces off the wall providing an up or down illumination.

W900 IPSH Cube LED wall light

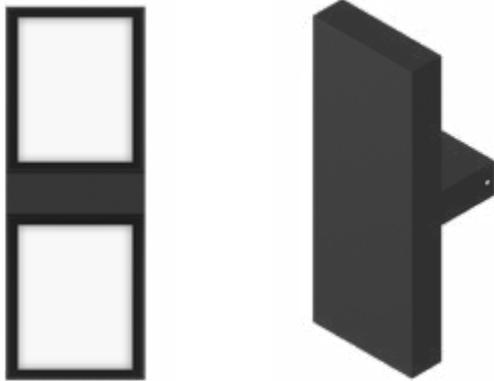


Electrical:	<u>Circuit Wattage:</u> 18.0W	<u>Delivered Light Efficacy:</u> 38lm/W	<u>Dimming:</u> No	<u>Longevity:</u> L70 = 70,000 Hrs
Optical:	<u>Delivered Lumens:</u> 685lm	<u>Colour Temperature:</u> 3000K (3K)	<u>Beam Angle:</u> 130°	<u>Tru-Colour:</u> Yes
Physical:	<u>Hole Cutout:</u> N/A	<u>Gimbal Angle:</u> N/A	<u>Warranty:</u> 3 years of luminaire warranty	<u>IP Rating:</u> IP54
	<u>Type:</u> Wall light	<u>Body Colour:</u> ● Black (B)	<u>Fascia Colour:</u> N/A	<u>Fascia Style:</u> N/A

Photometrics:



Dimensions:

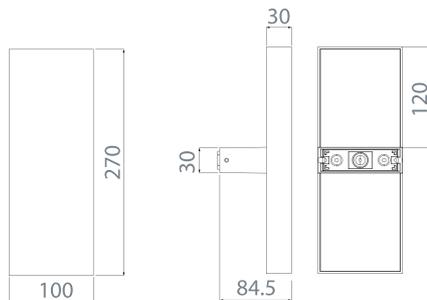

Specifying Product:	<u>Product Name</u>	<u>Family</u>	<u>Colour Temp.</u>	<u>Beam Angle</u>	<u>Body Colour</u>	<u>Version No.</u>	<u>Eg. Product Code</u>
	W900.IPSH	CB	3K	130°	Black	1.0	W900.IPSH-CB-3K-130-B-1.0

- W900 IPSH-CB has a dual soft indirect light source 130° beam angle. Light bounces off the wall providing an up and down illumination.







LINEAR

CUBE

CURVE

ACCESSORIES




D550+ Curve LED recessed



Electrical:	Circuit Wattage: 7.5W	Delivered Light Efficacy: 73-75lm/W	Dimming: Phase Dimming (Standard) DALI (special order)	Longevity: L70 B10 = 70,000 Hrs L50 = 110,000 Hrs
Optical:	Delivered Lumens: 550-560lm	Colour Temperature: 3000K (3K) 4000K (4K) 2700K (2.7K) (special order) 5000K (5K) (special order)	Beam Angle: 36°	Tru-Colour: Yes
Physical:	Hole Cutout: 64mm	Gimbal Angle: Universal (17° Tilt)	Warranty: 7 years of luminaire warranty & 5 years of driver warranty	IP Rating: IP44
	Type: Downlight	Body Colour: ● White (W) ● Black (B)	Fascia Colour: ● White ● Silver ● Black ● Champagne Gold ● Copper ● Gunmetal	Fascia Style: Heavyweight Flatline Fineline Portal Capsule
Photometrics:				Fascia Filter: Diffused Amber Blue Green Honeycomb
Dimensions:				

Specifying Product:	Product Name	Family	Colour Temp.	Beam Angle	Body Colour	Version No.	Eg. Product Code
*Fascias and filters specified separately, refer to pg128 and pg130 respectively.	D550+	CR	3K 4K	36°	White Black	1.0	D550+-CR-3K-36-W-1.0

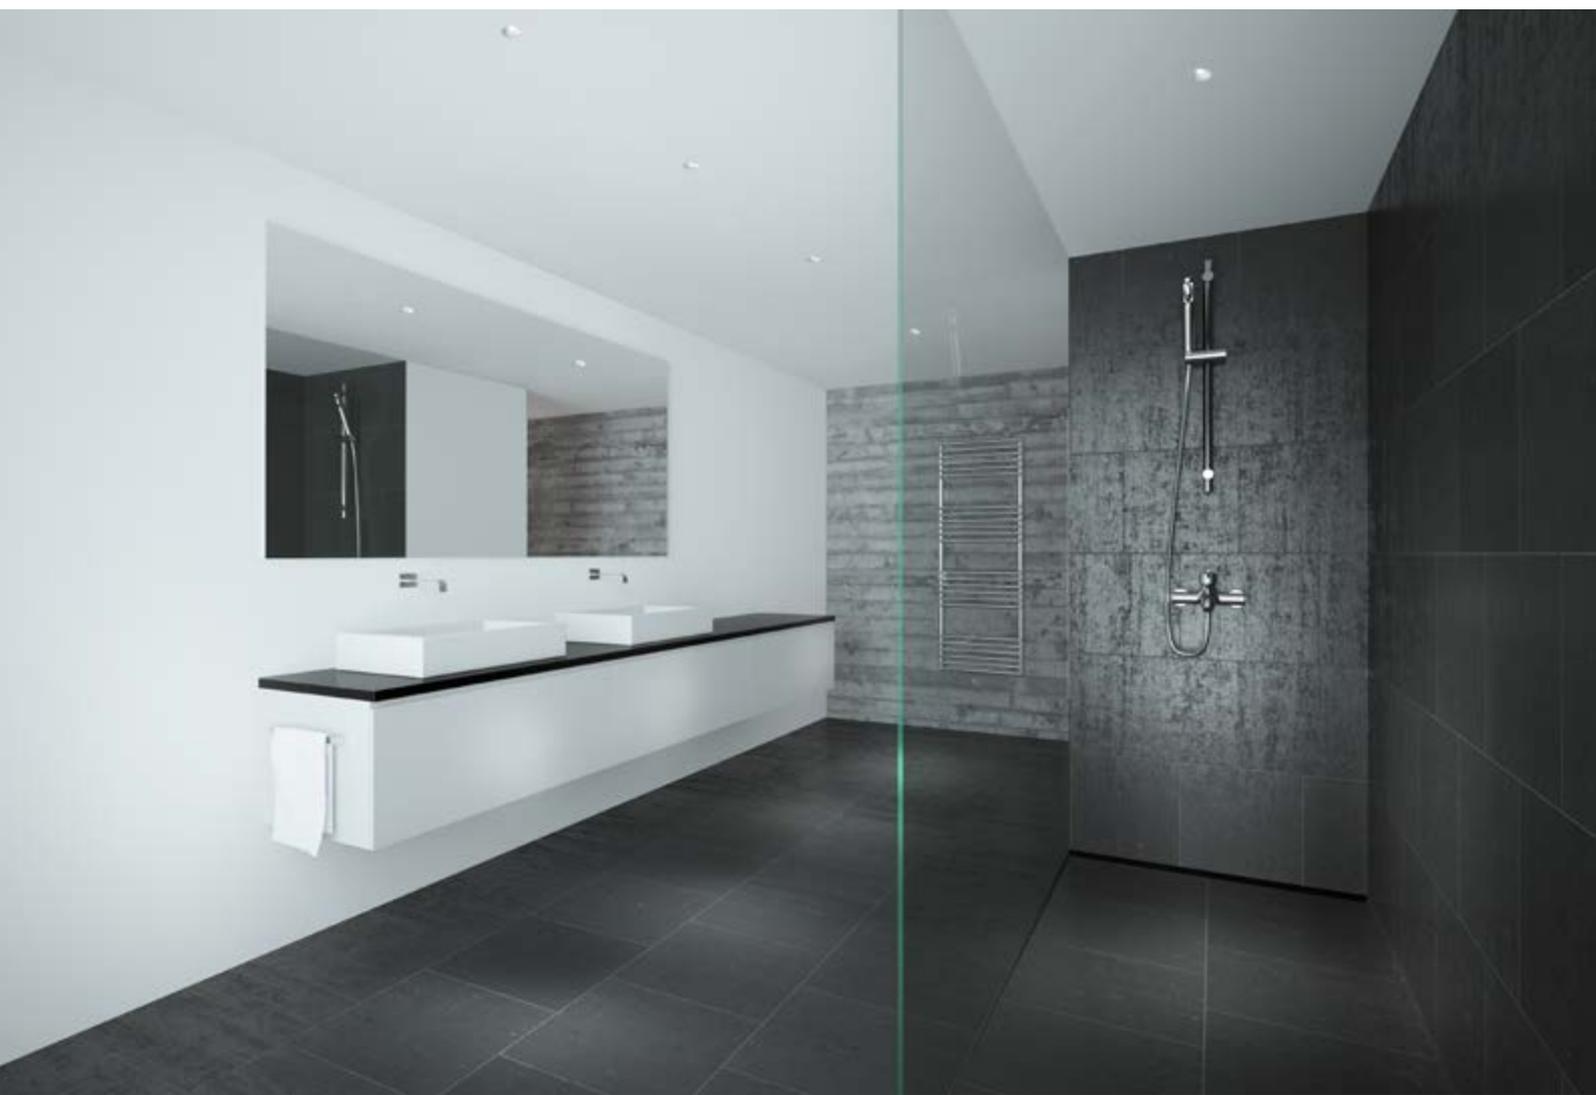

- Offering the same features and aesthetic of the multi-award winning D700+, the compact D550+ has a 36-degree beam – making it ideal for lighting smaller spaces or accenting feature and fittings with low-glare directional illumination.

D700+ Curve LED recessed




Electrical:	Circuit Wattage: 10.6W	Delivered Light Efficacy: 54-70lm/W	Dimming: Phase Dimming (Standard) DALI (special order)	Longevity: L70 B10 = 70,000 Hrs L50 = 110,000 Hrs
--------------------	----------------------------------	---	---	--

Optical:	Delivered Lumens: 570-745lm	Colour Temperature: 3000K (3K) 4000K (4K) 1800K-3100K (Night Shift) 2700K (2.7K) (special order) 5000K (5K) (special order)	Beam Angle: 55° 20° (special order) 35° (special order)	Tru-Colour: Yes
-----------------	---------------------------------------	---	---	---------------------------

Physical:	Hole Cutout: 92mm	Gimbal Angle: Universal (17° Tilt)	Warranty: 7 years of luminaire warranty & 5 years of driver warranty	IP Rating: IP44
------------------	-----------------------------	--	--	---------------------------


Type: Downlight	Body Colour: ● White (W) ● Black (B)	Fascia Colour: ● White ● Silver ● Black ● Champagne Gold ● Copper ● Gunmetal	Fascia Style: Heavyweight Flatline Fineline Portal Capsule
---------------------------	---	---	--

Photometrics:



Fascia Filter:
Diffused Amber Blue Green Honeycomb


Dimensions:

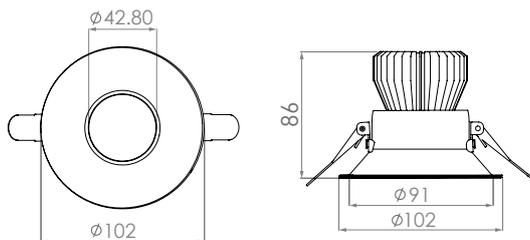

Specifying Product:	Product Name D700+	Family CR	Colour Temp. 3K 4K 1.8K.3.1K	Beam Angle 55°	Body Colour White Black	Version No. 1.6	Eg. Product Code D700+-CR-3K-55-W-1.6
----------------------------	------------------------------	---------------------	--	--------------------------	--------------------------------------	---------------------------	---

*Fascias and filters specified separately, refer to pg128 and pg130 respectively.

- Winner of a Melbourne Design Award and a Good Design Award Selection, the high-performance D700+ downlight features a unique, deeply recessed lens that has been proven to lower glare ratings and increase visual comfort in interior spaces. Featuring the same aesthetic as the D900+, which provides brighter task lighting, this design is ideal accompaniment to its larger counterpart.

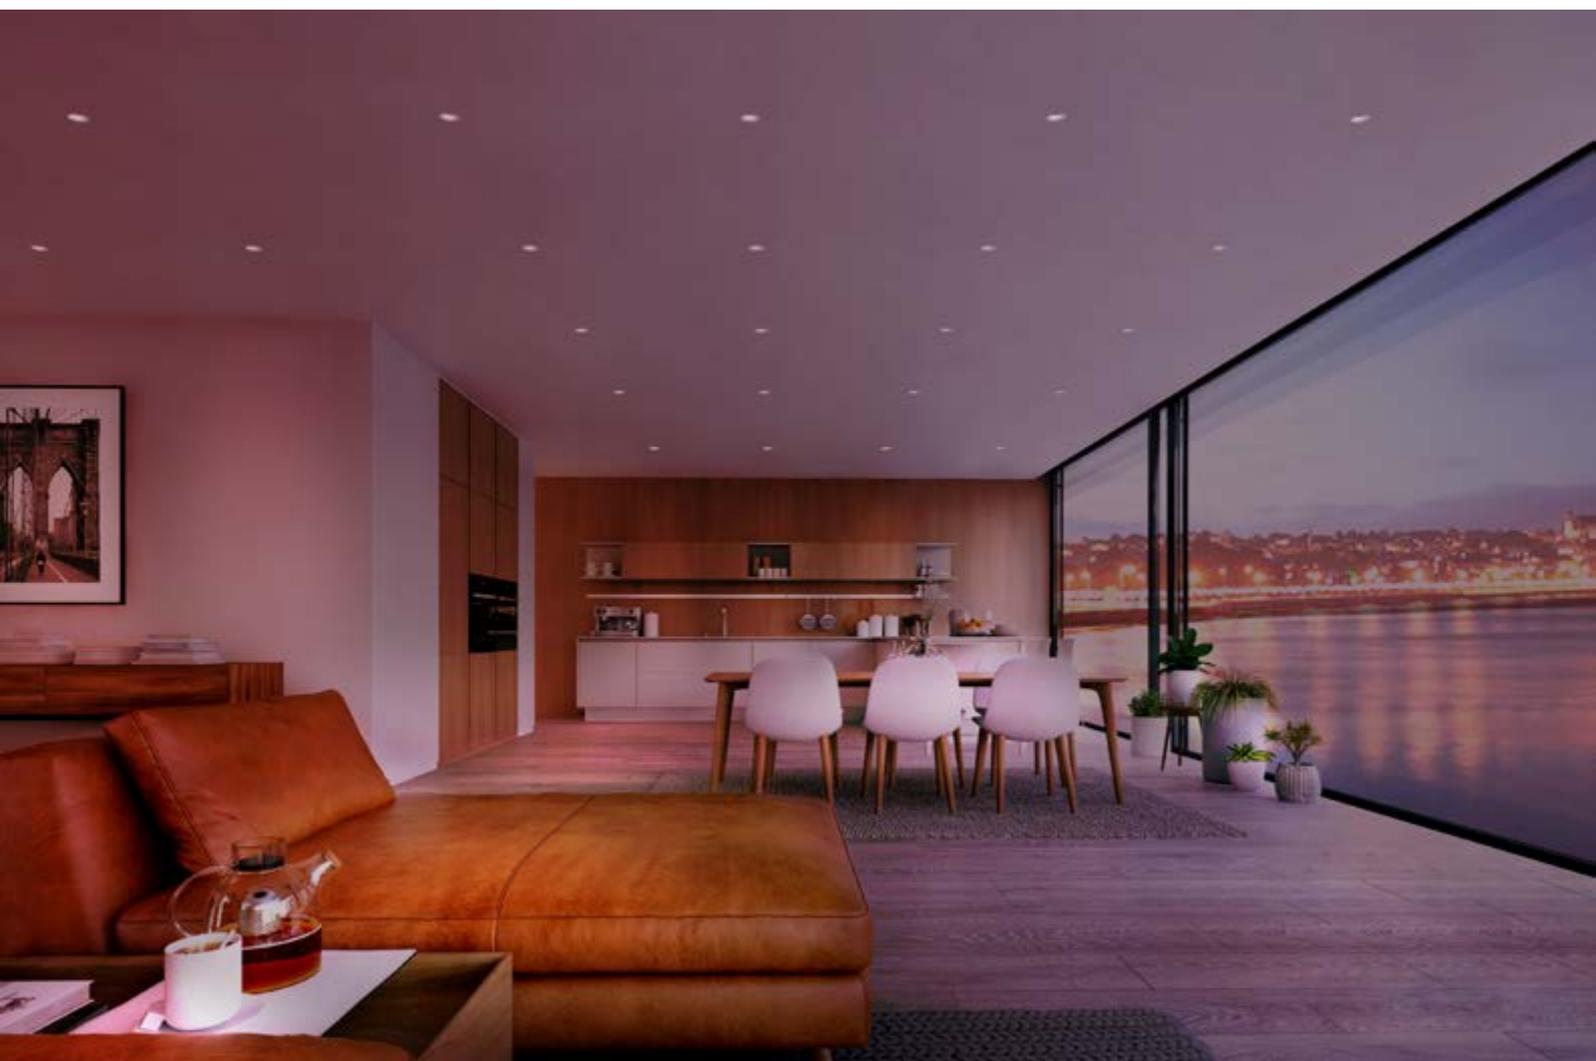


D700+ Trio Curve LED recessed




Electrical:	Circuit Wattage: 31.0W	Delivered Light Efficacy: 69-70lm/W	Dimming: Phase Dimming (Standard) DALI (special order)	Longevity: L70 B10 = 70,000 Hrs L50 = 110,000 Hrs
Optical:	Delivered Lumens: 2190-2235lm	Colour Temperature: 3000K (3K) 4000K (4K) 2700K (2.7K) (special order) 5000K (5K) (special order)	Beam Angle: 55° 20° (special order) 35° (special order)	Tru-Colour: Yes
Physical:	Hole Cutout: 3 x 92mm	Gimbal Angle: Universal (17° Tilt)	Warranty: 7 years of luminaire warranty & 5 years of driver warranty	IP Rating: IP44
	Type: Downlight	Body Colour: ● White (W) ● Black (B)	Fascia Colour: ● White (W) ● Black (B)	Fascia Style: Flatline

Photometrics:

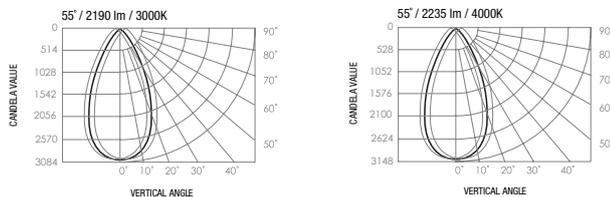

Dimensions:

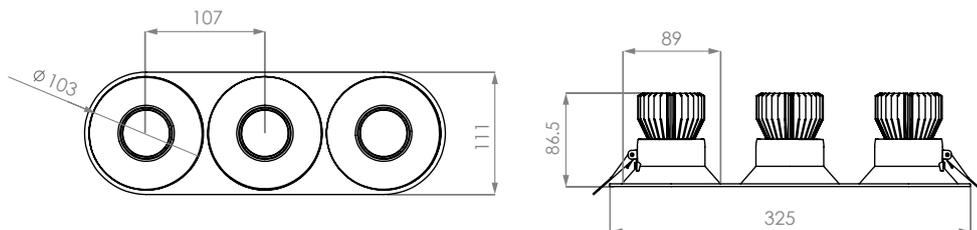


Specifying Product:	Product Name	Family	Colour Temp.	Beam Angle	Fascia Colour	Version No.	Eg. Product Code
	D700+.Trio	CR	3K 4K	55°	White Black	2.0	D700+.Trio-CR-3K-55-W-2.0

- Offering the flexibility of three separate universal gimbaling downlights, the D700+ Trio allows you to articulate each individual light source in different directions – giving you more control over where the light falls in your space. Projecting a total of 2390 lumens, the Trio provides more brightness so luminaires can be spaced further apart.



D900+ Curve LED recessed

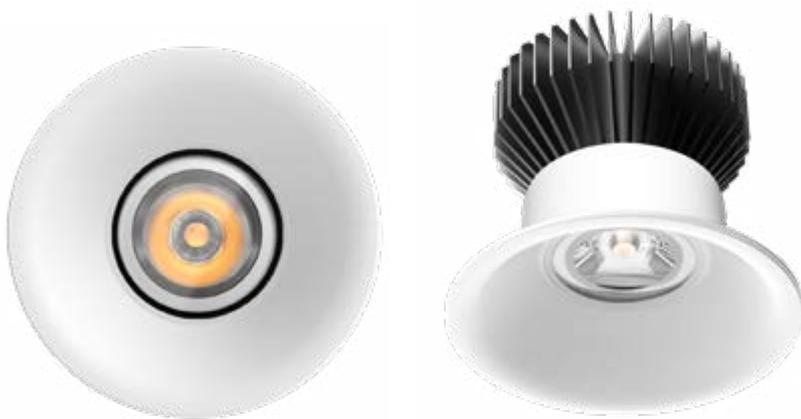


Electrical:	Circuit Wattage: 13.3W	Delivered Light Efficacy: 73-74lm/W	Dimming: Phase Dimming (Standard) DALI (special order)	Longevity: L70 B10 = 70,000 Hrs L50 = 110,000 Hrs
--------------------	----------------------------------	---	---	--

Optical:	Delivered Lumens: 970-990lm	Colour Temperature: 3000K (3K) 4000K (4K) 1800K-3100K (Night Shift) 2700K (2.7K) (special order) 5000K (5K) (special order)	Beam Angle: 55° 20° (special order) 35° (special order)	Tru-Colour: Yes
-----------------	---------------------------------------	---	---	---------------------------


Physical:	Hole Cutout: 92mm	Gimbal Angle: Universal (17° Tilt)	Warranty: 7 years of luminaire warranty & 5 years of driver warranty	IP Rating: IP44
------------------	-----------------------------	--	--	---------------------------

Type: Downlight	Body Colour: ● White (W) ● Black (B)	Fascia Colour: ● White ● Silver ● Black ● Champagne Gold ● Copper ● Gunmetal	Fascia Style: Heavyweight Flatline Fineline Portal Capsule
---------------------------	---	---	--

Photometrics:

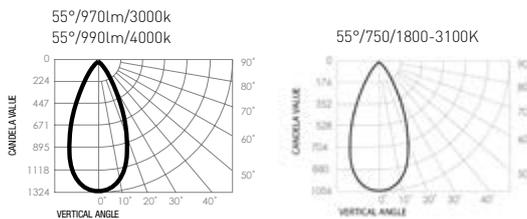


Dimensions:

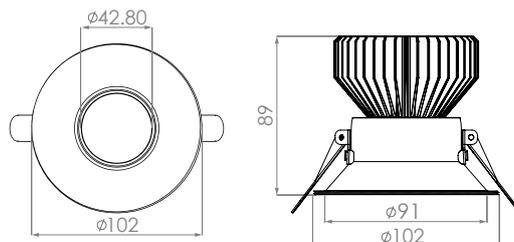

Specifying Product:

Product Name	Family	Colour Temp.	Beam Angle	Fascia Colour	Version No.	Eg. Product Code
D900+	CR	3K 4K 1.8K.3.1K	55°	White Black	2.0	D900+-CR-3K-55-W-2.0

*Fascias and filters specified separately, refer to pg128 and pg130 respectively.

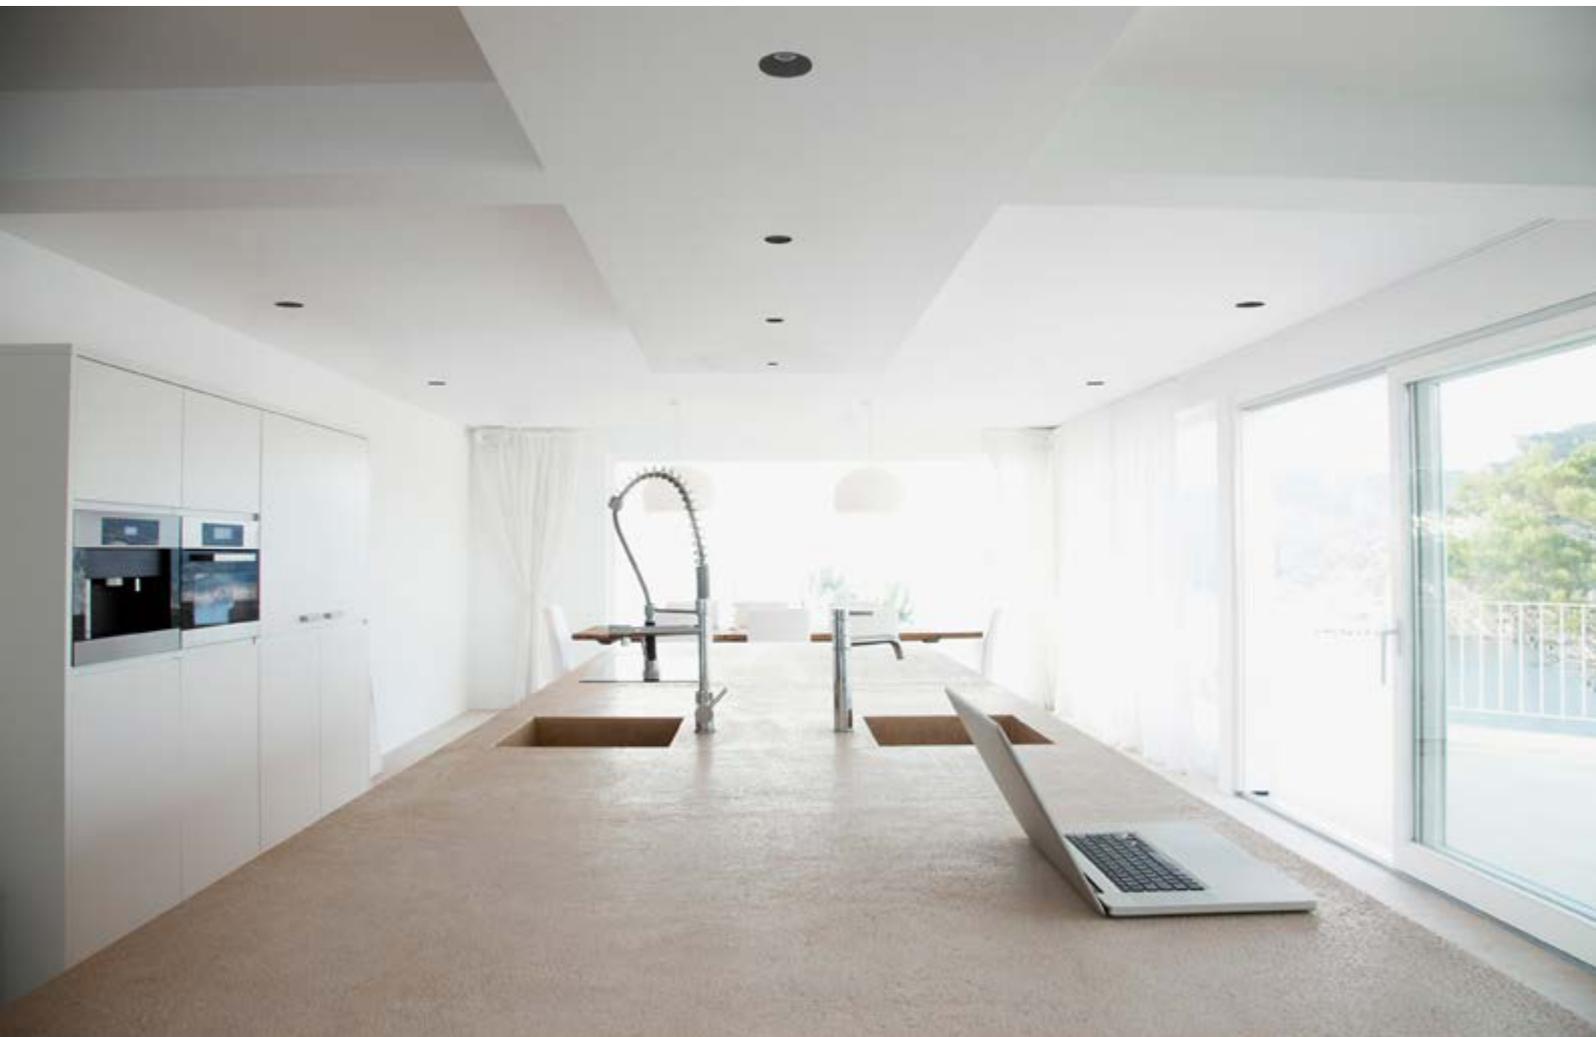


- Providing unparalleled flexibility and styling options, the D900+ can be paired with a range of different fascias and filters – allowing you to tailor the fitting to suit your space. Its unique 360-degree gimbal provides adaptability, and reduces heat loss via its patented ball-and-socket design.

D2000+ Curve LED recessed




Electrical:	Circuit Wattage: 25W	Delivered Light Efficacy: 80-82lm/W	Dimming: Phase Dimming (Standard) DALI (special order)	Longevity: L70 B10 = 70,000 Hrs L50 = 110,000 Hrs
Optical:	Delivered Lumens: 2000-2040lm	Colour Temperature: 3000K (3K) 4000K (4K) 2700K (2.7K) (special order) 5000K (5K) (special order)	Beam Angle: 55° 24° (special order) 38° (special order) 45° (special order)	Tru-Colour: Yes
Physical:	Hole Cutout: 127mm	Gimbal Angle: N/A	Warranty: 7 years of luminaire warranty & 5 years of driver warranty	IP Rating: IP44
	Type: Downlight	Body Colour: N/A	Fascia Colour: ● White (W) ● Black (B)	Fascia Style: N/A

Photometrics:

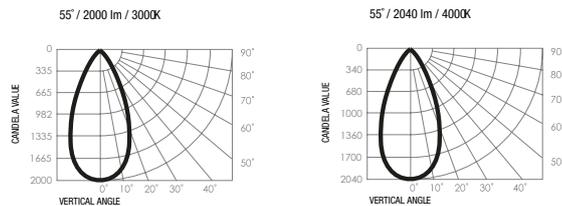

Dimensions:

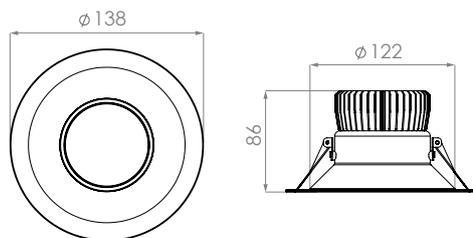

Specifying Product:	Product Name	Family	Colour Temp.	Beam Angle	Fascia Colour	Version No.	Eg. Product Code
	D2000+	CR	3K 4K	55°	White Black	1.0	D2000+-CR-3K-55-W-1.0




- Providing a powerful 2000 lumens of Tru-Colour brightness, The D2000+ is ideal for projects with high ceilings, as well as retail spaces and showrooms that require higher than average lux levels.

D550 Classic Curve LED recessed




Electrical:	Circuit Wattage: 7.5W	Delivered Light Efficacy: 73-75lm/W	Dimming: Phase Dimming (Standard) DALI (special order)	Longevity: L70 B10 = 70,000 Hrs L50 = 110,000 Hrs
Optical:	Delivered Lumens: 550-560lm	Colour Temperature: 3000K (3K) 4000K (4K) 2700K (2.7K) (special order) 5000K (5K) (special order)	Beam Angle: 36°	Tru-Colour: Yes
Physical:	Hole Cutout: 50mm	Gimbal Angle: 15°	Warranty: 7 years of luminaire warranty & 5 years of driver warranty	IP Rating: IP44
	Type: Downlight	Body Colour: ● Silver (S)	Fascia Colour: ● White (W) ● Silver (S)	Fascia Style: N/A

Photometrics:



Dimensions:

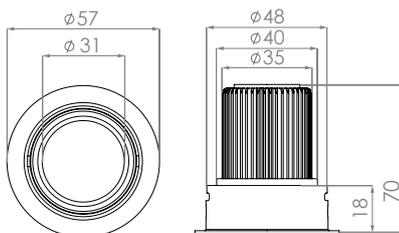

Specifying Product:

<u>Product Name</u>	<u>Family</u>	<u>Colour Temp.</u>	<u>Beam Angle</u>	<u>Fascia Colour</u>	<u>Version No.</u>	<u>Eg. Product Code</u>
D550.CL	CR	3K 4K	36°	White Silver	1.5	D550.CL-CR-3K-36-W-1.5




- The small but powerful D550 Classic Curve is ideal for installation above vanity mirrors or alcoves, providing unbeatable Tru-Colour light quality.

D700 Classic Curve LED recessed




Electrical:	Circuit Wattage: 10.6W	Delivered Light Efficacy: 69-70lm/W	Dimming: Phase Dimming (Standard) DALI (special order)	Longevity: L70 B10 = 70,000 Hrs L50 = 110,000 Hrs
Optical:	Delivered Lumens: 730-745lm	Colour Temperature: 3000K (3K) 4000K (4K) 2700K (2.7K) (special order) 5000K (5K) (special order)	Beam Angle: 55° 20° (special order) 35° (special order)	Tru-Colour: Yes
Physical:	Hole Cutout: 70mm	Gimbal Angle: 15°	Warranty: 7 years of luminaire warranty & 5 years of driver warranty	IP Rating: IP44
	Type: Downlight	Body Colour: ● Black (B)	Fascia Colour: ○ White (W) ● Silver (S)	Fascia Style: N/A

Photometrics:



Dimensions:

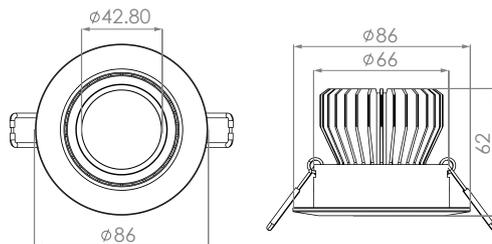

Specifying Product:

Product Name	Family	Colour Temp.	Beam Angle	Fascia Colour	Version No.	Eg. Product Code
D700.CL	CR	3K 4K	55°	White Silver	2.6	D700.CL-CR-3K-55-W-2.6



•The D700 Classic has a 70mm fascia, making it ideal for replacing old halogen fittings. With an IC-rated heatsink for improved thermal efficiency and advanced digital driver technology, this compact fitting offers incredible value.


D700 W Curve LED recessed




Electrical:	Circuit Wattage: 10.6W	Delivered Light Efficacy: 69-70lm/W	Dimming: Phase Dimming (Standard) DALI (special order)	Longevity: L70 B10 = 70,000 Hrs L50 = 110,000 Hrs
Optical:	Delivered Lumens: 730-745lm	Colour Temperature: 3000K (3K) 4000K (4K) 2700K (2.7K) (special order) 5000K (5K) (special order)	Beam Angle: 55°	Tru-Colour: Yes
Physical:	Hole Cutout: 85mm	Gimbal Angle: 15°	Warranty: 7 years of luminaire warranty & 5 years of driver warranty	IP Rating: IP44
	Type: Downlight	Body Colour: ● Black (B)	Fascia Colour: ● White (W) ● Black(S)	Fascia Style: N/A

Photometrics:


55°/730lm/3k



55°/745lm/4k



Dimensions:

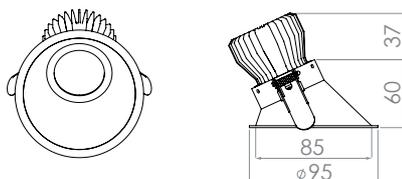

Specifying Product:

<u>Product Name</u>	<u>Family</u>	<u>Colour Temp.</u>	<u>Beam Angle</u>	<u>Fascia Colour</u>	<u>Version No.</u>	<u>Eg. Product Code</u>
D700.W	CR	3K 4K	55°	White Black	1.0	D700.W-CR-3K-55-W-1.0




•The D700-W is designed to direct its light to the side of your space. Perfect for washing walls with Tru Colour illumination from above.

D900 Classic Curve LED recessed




Electrical:	Circuit Wattage: 13.3W	Delivered Light Efficacy: 76-78lm/W	Dimming: Phase Dimming (Standard) DALI (special order)	Longevity: L70 B10 = 70,000 Hrs L50 = 110,000 Hrs
Optical:	Delivered Lumens: 1015-1035lm	Colour Temperature: 3000K (3K) 4000K (4K) 1800K-3100K (1.8K-3.1K) (Night Shift) (special order) 2700K (2.7K) (special order) 5000K (5K) (special order)	Beam Angle: 45° 55° 24° (special order) 38° (special order)	Tru-Colour: Yes
Physical:	Hole Cutout: 95mm	Gimbal Angle: 15°	Warranty: 7 years of luminaire warranty & 5 years of driver warranty	IP Rating: IP44
	Type: Downlight	Body Colour: ● Silver (S)	Fascia Colour: ● White (W) ● Silver (S)	Fascia Style: N/A

Photometrics:

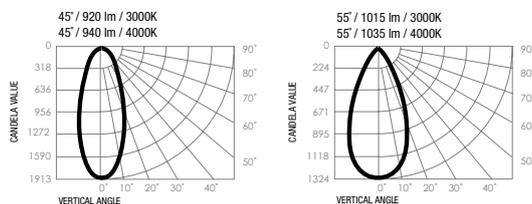

Dimensions:

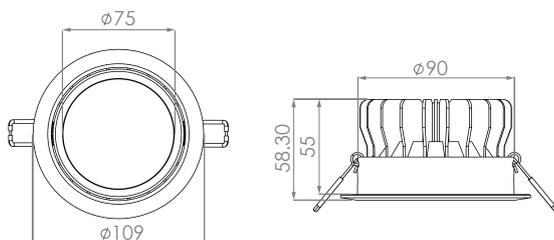

Specifying Product:

Product Name	Family	Colour Temp.	Beam Angle	Fascia Colour	Version No.	Eg. Product Code
D900.CL	CR	3K 4K	45° 55°	White Silver	3.5	D900.CL-CR-3K-45-W-3.5




•The world's first LED downlight to match the brightness of a 50W halogen, the third version of Brightgreen's most popular downlight – the D900 Classic – features a new and improved heatsink and our advanced digital driver for seamless control with home automation systems.

DR700 Curve LED recessed




Electrical:	<u>Circuit Wattage:</u> 10.6W	<u>Delivered Light Efficacy:</u> 69-70lm/W	<u>Dimming:</u> Phase Dimming (Standard) DALI (special order)	<u>Longevity:</u> L70 B10 = 70,000 Hrs L50 = 110,000 Hrs
Optical:	<u>Delivered Lumens:</u> 730-745lm	<u>Colour Temperature:</u> 3000K (3K) 4000K (4K) 1800K-3100K (Night Shift)* 2700K (2.7K)* 5000K (5K)* *special order	<u>Beam Angle:</u> 55° 20° (special order) 35° (special order)	<u>Tru-Colour:</u> Yes
Physical:	<u>Hole Cutout:</u> According to fascia	<u>Gimbal Angle:</u> According to fascia	<u>Warranty:</u> 7 years of luminaire warranty & 5 years of driver warranty	<u>IP Rating:</u> IP44
	<u>Type:</u> Downlight	<u>Body Colour:</u> ● Black (B)	<u>Fascia Colour:</u> N/A	<u>Fascia Style:</u> N/A

Photometrics:



Dimensions:

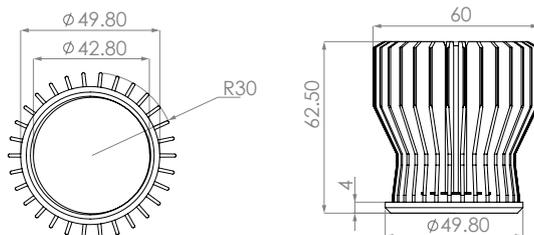


Specifying Product:	<u>Product Name</u> DR700.PC	<u>Family</u> CR	<u>Colour Temp.</u> 3K 4K	<u>Beam Angle</u> 55°	<u>Version No.</u> 2.6	<u>Eg. Product Code</u> DR700.PC-CR-3K-55-2.6
----------------------------	---------------------------------	---------------------	---------------------------------	--------------------------	---------------------------	--




- Ideal for general illumination, the DR700 Curve comes fascia-free, making for easy installation with existing fascias.

D900 S Curve LED surface

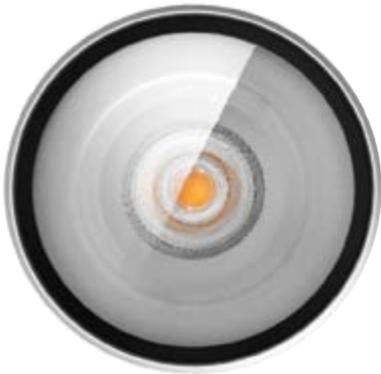


Electrical:	Circuit Wattage: 12W	Delivered Light Efficacy: 75-77lm/W	Dimming: Phase Dimming (Standard)	Longevity: L70 B10 = 70,000 Hrs L50 = 110,000 Hrs
Optical:	Delivered Lumens: 900-920lm	Colour Temperature: 3000K (3K) 4000K (4K) 2700K (2.7K) (special order) 5000K (5K) (special order)	Beam Angle: 25° 40°	Tru-Colour: Yes
Physical:	Hole Cutout: 20mm	Gimbal Angle: N/A	Warranty: 7 years of luminaire warranty & 5 years of driver warranty	IP Rating: IP44
	Type: Surface-mounted	Body Colour: ● White (W) ● Black (B)	Fascia Colour: N/A	Fascia Style: N/A

Photometrics:

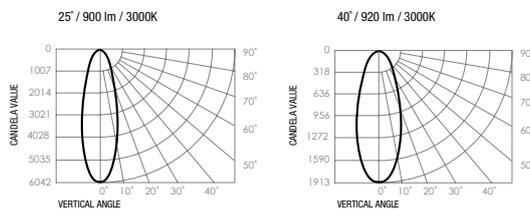

Dimensions:

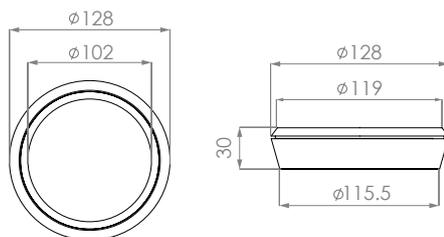

Specifying Product:

Product Name	Family	Colour Temp.	Beam Angle	Body Colour	Version No.	Eg. Product Code
D900.S	CR	3K 4K	25° 40°	White Black	1.0	D900.S-CR-3K-25-W-1.0



- Designed for high-end projects, the low-profile D900 S Curve is the slimmest directional surface-mounted downlight on the market. Offering a minimal aesthetic and unbeatable thermal performance, this ultra slimline design produces 900 lumens of Tru-Colour brightness.

D550 SH Curve LED surface




Electrical:	Circuit Wattage: 8.5W	Delivered Light Efficacy: 65-66lm/W	Dimming: Phase Dimming (Standard)	Longevity: L70 B10 = 70,000 Hrs L50 = 110,000 Hrs
--------------------	---------------------------------	---	---	--

Optical:	Delivered Lumens: 550-560lm	Colour Temperature: 3000K (3K) 4000K (4K) 2700K (2.7K) (special order) 5000K (5K) (special order)	Beam Angle: 36°	Tru-Colour: Yes
-----------------	---------------------------------------	--	---------------------------	---------------------------


Physical:	Hole Cutout: 20mm	Gimbal Angle: N/A	Warranty: 7 years of luminaire warranty & 5 years of driver warranty	IP Rating: IP44
------------------	-----------------------------	-----------------------------	--	---------------------------

Type: Surface-mounted	Body Colour: <input type="radio"/> White (W) <input checked="" type="radio"/> Black (B)	Fascia Colour: <input checked="" type="radio"/> Black (B)	Fascia Style: N/A
---------------------------------	--	---	-----------------------------

Photometrics:



Dimensions:

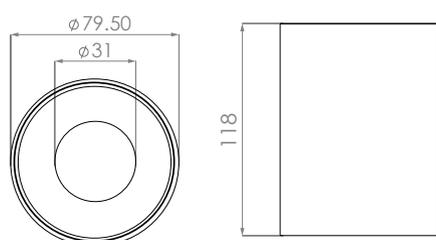

Specifying Product:	Product Name	Family	Colour Temp.	Beam Angle	Body Colour	Version No.	Eg. Product Code
	D550.SH	CR	3K 4K	36°	White Black	1.5	D550.SH-CR-3K-36-W-1.5




- The petite D550 SH Curve can be used with the larger surface-mounted designs to create a sense of consistency and balance throughout interiors, or to accent pieces in spaces with recessed downlights.

D900 SH Curve LED surface




Electrical:	Circuit Wattage: 16.5W	Delivered Light Efficacy: 55-56lm/W	Dimming: Phase Dimming (Standard) DALI (special order)	Longevity: L70 B10 = 70,000 Hrs L50 = 110,000 Hrs
Optical:	Delivered Lumens: 900-920lm	Colour Temperature: 3000K (3K) 4000K (4K) 1800K-3100K (1.8K-3.1K) (Night Shift) (special order) 2700K (2.7K) (special order) 5000K (5K) (special order)	Beam Angle: 45° 24° (special order) 38° (special order) 55° (special order)	Tru-Colour: Yes
Physical:	Hole Cutout: 20mm	Gimbal Angle: N/A	Warranty: 7 years of luminaire warranty & 5 years of driver warranty	IP Rating: IP44
	Type: Surface-mounted	Body Colour: <input type="radio"/> White (W) <input checked="" type="radio"/> Black (B)	Fascia Colour: <input checked="" type="radio"/> Black (B)	Fascia Style: N/A

Photometrics:



Dimensions:

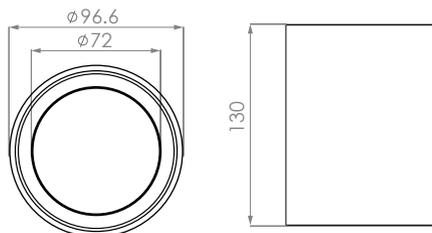

Specifying Product:

<u>Product Name</u>	<u>Family</u>	<u>Colour Temp.</u>	<u>Beam Angle</u>	<u>Body Colour</u>	<u>Version No.</u>	<u>Eg. Product Code</u>
D900.SH	CR	3K 4K	45°	White Black	1.5	D900.SH-CR-3K-45-W-1.5

- Designed to draw eyes upwards during the day and project brilliant Tru-Colour brightness in the evenings, the D900 SH Curve increases home thermal efficiency by eliminating the need for large cutouts and gaps in insulation.




D2000 SH Curve LED surface




Electrical:	Circuit Wattage: 24W	Delivered Light Efficacy: 83-85lm/W	Dimming: Phase Dimming (Standard) DALI (special order)	Longevity: L70 B10 = 70,000 Hrs L50 = 110,000 Hrs
Optical:	Delivered Lumens: 2000-2040lm	Colour Temperature: 3000K (3K) 4000K (4K) 1800K-3100K (1.8K-3.1K) (Night Shift) (special order) 2700K (2.7K) (special order) 5000K (5K) (special order)	Beam Angle: 55° 24° (special order) 38° (special order) 45° (special order)	Tru-Colour: Yes
Physical:	Hole Cutout: 20mm	Gimbal Angle: N/A	Warranty: 7 years of luminaire warranty & 5 years of driver warranty	IP Rating: IP44
	Type: Surface-mounted	Body Colour: <input type="radio"/> White (W) <input checked="" type="radio"/> Black (B)	Fascia Colour: <input checked="" type="radio"/> Black (B)	Fascia Style: N/A

Photometrics:



Dimensions:

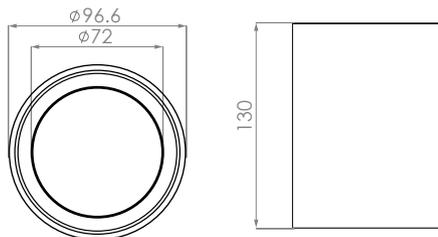

Specifying Product:

<u>Product Name</u>	<u>Family</u>	<u>Colour Temp.</u>	<u>Beam Angle</u>	<u>Body Colour</u>	<u>Version No.</u>	<u>Eg. Product Code</u>
D2000.SH	CR	3K 4K	55°	White Black	1.5	D2000.SH-CR-3K-55-W-1.5

- Ideal for retail and commercial spaces, the D2000 SH Curve provides a powerful 2000 lumens of Tru-Colour illumination to showcase the colour, detail and quality of both stock and store fittings.



D550 SHX Curve LED surface



Electrical:

Circuit Wattage:

8.5W

Delivered Light Efficacy:

65-66lm/W

Dimming:

Phase Dimming
(Standard)

Longevity:

L70 B10 = 70,000 Hrs
L50 = 110,000 Hrs

Optical:

Delivered Lumens:

550-560lm

Colour Temperature:

3000K (3K)
4000K (4K)
2700K (2.7K) (special order)
5000K (5K) (special order)

Beam Angle:

36°

Tru-Colour:

Yes

Physical:

Hole Cutout:

20mm

Gimbal Angle:

90° (360° rotation)

Warranty:

7 years of luminaire
warranty & 5 years of
driver warranty

IP Rating:

IP44

Type:

Surface-mounted

Body Colour:

● White (W)
● Black (B)


Fascia Colour:

● Black (B)


Fascia Style:

N/A

Photometrics:



Dimensions:

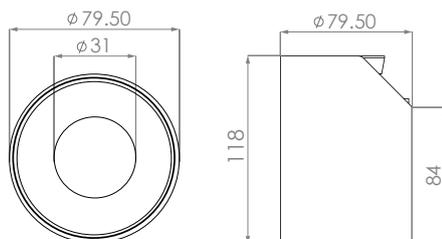

Specifying Product:

<u>Product Name</u>	<u>Family</u>	<u>Colour Temp.</u>	<u>Beam Angle</u>	<u>Body Colour</u>	<u>Version No.</u>	<u>Eg. Product Code</u>
D550.SHX	CR	3K 4K	36°	White Black	1.5	D550.SHX-CR-3K-36-W-1.5




- The fully adjustable D550 SHX Curve features a constant friction hinge, allowing the fitting to be easily readjusted, while at the same time ensuring that it stays where intended for years to come.

D900 SHX Curve LED surface




Electrical:	Circuit Wattage: 16.5W	Delivered Light Efficacy: 55-56lm/W	Dimming: Phase Dimming (Standard) DALI (special order)	Longevity: L70 B10 = 70,000 Hrs L50 = 110,000 Hrs
Optical:	Delivered Lumens: 900-920lm	Colour Temperature: 3000K (3K) 4000K (4K) 1800K-3100K (1.8K-3.1K) (Night Shift) (special order) 2700K (2.7K) (special order) 5000K (5K) (special order)	Beam Angle: 45° 24° (special order) 38° (special order) 55° (special order)	Tru-Colour: Yes
Physical:	Hole Cutout: 20mm	Gimbal Angle: 90° (360° rotation)	Warranty: 7 years of luminaire warranty & 5 years of driver warranty	IP Rating: IP44
	Type: Surface-mounted	Body Colour: ● White (W) ● Black (B)	Fascia Colour: ● Black (B)	Fascia Style: N/A

Photometrics:



Dimensions:

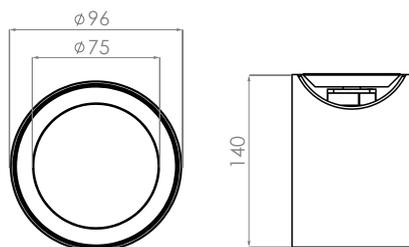

Specifying Product:	Product Name	Family	Colour Temp.	Beam Angle	Body Colour	Version No.	Eg. Product Code
	D900.SHX	CR	3K 4K	45°	White Black	1.5	D900.SHX-CR-3K-45-W-1.5

- The fully adjustable D900 SHX Curve features a 90-degree angle tilt and a 360-degree body rotation, allowing you to reorient its 45-degree beam in any direction you please.




D2000 SHX Curve LED surface




Electrical:	Circuit Wattage: 24W	Delivered Light Efficacy: 83-85lm/W	Dimming: Phase Dimming (Standard) DALI (special order)	Longevity: L70 B10 = 70,000 Hrs L50 = 110,000 Hrs
Optical:	Delivered Lumens: 2000-2040lm	Colour Temperature: 3000K (3K) 4000K (4K) 1800K-3100K (1.8K-3.1K) (Night Shift) (special order) 2700K (2.7K) (special order) 5000K (5K) (special order)	Beam Angle: 55° 24° (special order) 38° (special order) 45° (special order)	Tru-Colour: Yes
Physical:	Hole Cutout: 20mm	Gimbal Angle: 90° (360° rotation)	Warranty: 7 years of luminaire warranty & 5 years of driver warranty	IP Rating: IP44
	Type: Surface-mounted	Body Colour: ● White (W) ● Black (B)	Fascia Colour: ● Black (B)	Fascia Style: N/A

Photometrics:



Dimensions:

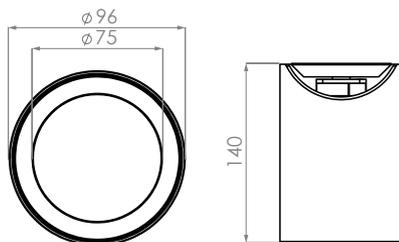

Specifying Product:

<u>Product Name</u>	<u>Family</u>	<u>Colour Temp.</u>	<u>Beam Angle</u>	<u>Body Colour</u>	<u>Eg. Product Code</u>	<u>Version No.</u>
D2000.SHX	CR	3K 4K	55°	White Black	D2000.SHX-CR-3K-55-W-1.5	1.5

- Featuring a 45-degree beam angle, the powerful D2000 SHX Curve is ideal for spotlighting in spaces with high ceilings.




T550 H Curve LED track light




Electrical:	Circuit Wattage: 8.5W	Delivered Light Efficacy: 65-66lm/W	Dimming: Phase Dimming (Standard)	Longevity: L70 B10 = 70,000 Hrs L50 = 110,000 Hrs
Optical:	Delivered Lumens: 550-560lm	Colour Temperature: 3000K (3K) 4000K (4K) 2700K (2.7K) (special order) 5000K (5K) (special order)	Beam Angle: 36°	Tru-Colour: Yes
Physical:	Base: H-Track (Single circuit) Eurotrack (Three circuit - special order)	Gimbal Angle: 90° (360° rotation)	Warranty: 7 years of luminaire warranty & 5 years of driver warranty	IP Rating: IP44
	Type: Track Light	Body Colour: ● White (W) ● Black (B)	Fascia Colour: ● Black (B)	Fascia Style: N/A

Photometrics:



Dimensions:

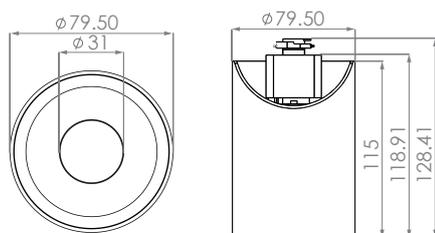

Specifying Product:

<u>Product Name</u>	<u>Base</u>	<u>Series</u>	<u>Colour Temp.</u>	<u>Beam Angle</u>	<u>Body Colour</u>	<u>Version No.</u>	<u>Eg. Product Code</u>
T550.H	H1 E3	CR	3K 4K	36°	White Black	1.5	T550.H.H1-CR-3K-36-W-1.5




- Ideal for spotlighting interior features and artworks, the T550 H Curve is available in both H-track and Euro track for fast, easy installation.

T900 H Curve LED track light




Electrical:	Circuit Wattage: 16.5W	Delivered Light Efficacy: 55-56lm/W	Dimming: Phase Dimming (Standard) DALI (special order)	Longevity: L70 B10 = 70,000 Hrs L50 = 110,000 Hrs
Optical:	Delivered Lumens: 900-920lm	Colour Temperature: 3000K (3K) 4000K (4K) 2700K (2.7K) (special order) 5000K (5K) (special order)	Beam Angle: 45° 24° (special order) 38° (special order) 55° (special order)	Tru-Colour: Yes
Physical:	Base: H-Track (Single circuit) Eurotrack (Three circuit - special order)	Gimbal Angle: 90° (360° rotation)	Warranty: 7 years of luminaire warranty & 5 years of driver warranty	IP Rating: IP44
	Type: Track Light	Body Colour: <input type="radio"/> White (W) <input type="radio"/> Black (B)	Fascia Colour: <input checked="" type="radio"/> Black (B)	Fascia Style: N/A

Photometrics:



Dimensions:

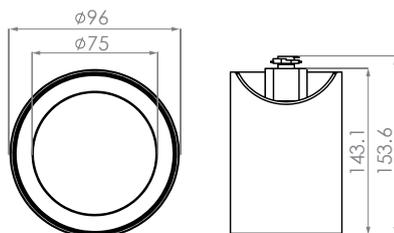

Specifying Product:	Product Name	Base	Series	Colour Temp.	Beam Angle	Body Colour	Version No.	Eg. Product Code
	T900.H	H1	CR	3K	45°	White	1.5	T900.H.H1-CR-3K-45-W-1.5
		E3		4K		Black		




- Offering track light versatility in a simple, minimalist design, the gallery-grade T900 H features a constant friction hinge for seamlessly smooth adjustments. Available in Euro track and H-track bases, this fitting can be used in both new and existing tracks.

T2000 H Curve LED track light




Electrical:	Circuit Wattage: 24W	Delivered Light Efficacy: 83-85lm/W	Dimming: Phase Dimming (Standard) DALI (special order)	Longevity: L70 B10 = 70,000 Hrs L50 = 110,000 Hrs
Optical:	Delivered Lumens: 2000-2040lm	Colour Temperature: 3000K (3K) 4000K (4K) 2700K (2.7K) (special order) 5000K (5K) (special order)	Beam Angle: 55° 24° (special order) 38° (special order) 45° (special order)	Tru-Colour: Yes
Physical:	Base: H-Track (Single circuit) Eurotrack (Three circuit - special order)	Gimbal Angle: 90° (360° rotation)	Warranty: 7 years of luminaire warranty & 5 years of driver warranty	IP Rating: IP44
	Type: Track Light	Body Colour: <input type="radio"/> White (W) <input checked="" type="radio"/> Black (B)	Fascia Colour: <input checked="" type="radio"/> Black (B)	Fascia Style: N/A

Photometrics:



Dimensions:

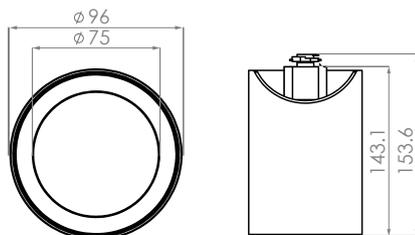

Specifying Product:

Product Name	Base	Series	Colour Temp.	Beam Angle	Body Colour	Version No.	Eg. Product Code
T2000.H	H1 E3	CR	3K 4K	55°	White Black	1.5	T2000.H.H1-CR-3K-55-W-1.5

• Available in black and white finishes, the flexible and powerful T2000 H Curve eliminates the complicated adjustment mechanisms generally associated with track lighting, replacing them with a constant friction hinge designed for seamlessly smooth adjustments.




TR700 Curve LED track light




Electrical:	Circuit Wattage: 12W	Delivered Light Efficacy: 60-61lm/W	Dimming: Phase Dimming (Standard)	Longevity: L70 B10 = 40,000 Hrs L50 = 65,000 Hrs
Optical:	Delivered Lumens: 720-735lm	Colour Temperature: 3000K (3K) 4000K (4K) 2700K (2.7K) (special order) 5000K (5K) (special order)	Beam Angle: 40° 60°	Tru-Colour: Yes
Physical:	Base: H-Track (Single circuit) Eurotrack (Three circuit - special order)	Gimbal Angle: 90° (360° rotation)	Warranty: 3 years of luminaire warranty & 3 years of driver warranty	IP Rating: IP40
	Type: Track Light	Body Colour: <input type="radio"/> White (W) <input checked="" type="radio"/> Black (B)	Fascia Colour: N/A	Fascia Style: N/A

Photometrics:

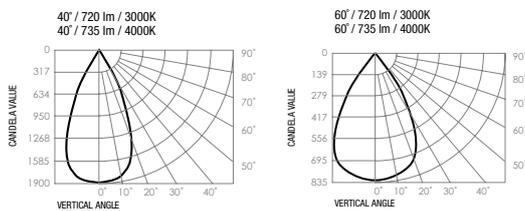

Dimensions:



Specifying Product:

<u>Product Name</u>	<u>Base</u>	<u>Series</u>	<u>Colour Temp.</u>	<u>Beam Angle</u>	<u>Body Colour</u>	<u>Version No.</u>	<u>Eg. Product Code</u>
TR700	H1	CR	3K	40°	White	1.0	TR700.H1-CR-3K-40-W-1.0
	E3		4K	60°	Black		




•Featuring an integrated driver the TR700 track light makes retrofitting into existing Euro or H-tracks simple.

P900 Curve LED pendant




Electrical:	Circuit Wattage: 16.5W	Delivered Light Efficacy: 55-56lm/W	Dimming: Phase Dimming (Standard) DALI (special order)	Longevity: L70 B10 = 70,000 Hrs L50 = 110,000 Hrs
Optical:	Delivered Lumens: 900-920lm	Colour Temperature: 3000K (3K) 4000K (4K) 2700K (2.7K) (special order) 5000K (5K) (special order)	Beam Angle: 45° 24° (special order) 38° (special order) 55° (special order)	Tru-Colour: Yes
Physical:	Hole Cutout: 20mm	Gimbal Angle: N/A	Warranty: 7 years of luminaire warranty & 5 years of driver warranty	IP Rating: IP44
	Type: Pendant	Body Colour: ● White (W) ● Black (B)	Fascia Colour: ● Black (B)	Fascia Style: N/A

Photometrics:



Dimensions:

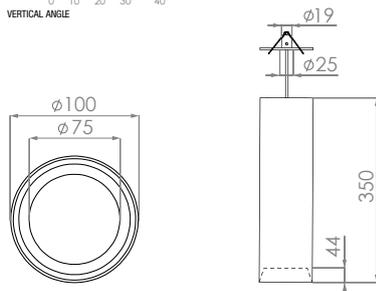


Specifying Product:	Product Name	Family	Colour Temp.	Beam Angle	Body Colour	Version No.	Eg. Product Code
	P900	CR	3K 4K	45°	White Black	1.6	P900-CR-3K-45-W-1.6




- Perfect for illuminating centres of the home, like dining areas and kitchen benches, the minimalist P900 Curve pairs stylish simplicity with Tru-Colour light quality.

W200 Curve LED wall light

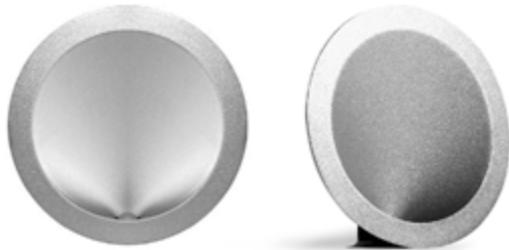


Electrical:	Circuit Wattage: 5W	Delivered Light Efficacy: 40lm/W	Dimming: Phase Dimming (Standard) DALI (special order)	Longevity: L70 B10 = 70,000 Hrs L50 = 110,000 Hrs
Optical:	Delivered Lumens: 200lm	Colour Temperature: 3000K (3K) 2700K (2.7K) (special order) 5000K (5K) (special order)	Beam Angle: 90/75°	Tru-Colour: Yes
Physical:	Hole Cutout: 67mm	Gimbal Angle: N/A	Warranty: 7 years of luminaire warranty & 5 years of driver warranty	IP Rating: IP43
	Type: Wall light	Body Colour: N/A	Fascia Colour: ● White (W) ● Silver (S)	Fascia Style: N/A

Photometrics:

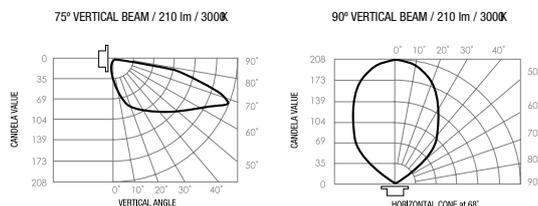

Dimensions:



Specifying Product:	Product Name	Family	Colour Temp.	Beam Angle	Fascia Colour	Version No.	Eg. Product Code
	W200	CR	3K	90/75°	White Silver	1.5	W200-CR-3K-90.75-W-1.5

• Often copied but never beaten, the W200 Curve is perfect for orientation lighting. It can even be used in conjunction with motion detectors for hassle-free way finding.




W900 Curve LED wall light




Electrical:	Circuit Wattage: 16W	Delivered Light Efficacy: 56lm/W	Dimming: Phase Dimming (Standard) DALI (special order)	Longevity: L70 B10 = 70,000 Hrs L50 = 110,000 Hrs
Optical:	Delivered Lumens: 900lm	Colour Temperature: 3000K (3K) 2700K (2.7K) (special order) 5000K (5K) (special order)	Beam Angle: 90/75°	Tru-Colour: Yes
Physical:	Hole Cutout: 135mm	Gimbal Angle: N/A	Warranty: 7 years of luminaire warranty & 5 years of driver warranty	IP Rating: IP43
	Type: Wall light	Body Colour: N/A	Fascia Colour: ○ White (W) ● Silver (S)	Fascia Style: N/A

Photometrics:

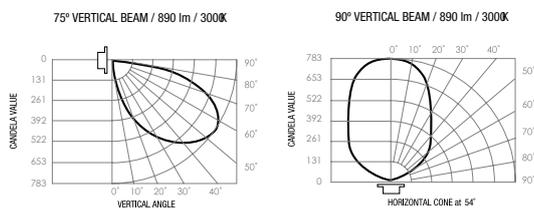

Dimensions:

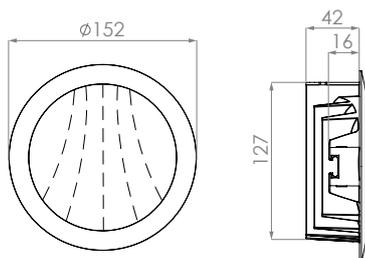

Specifying Product:	Product Name	Family	Colour Temp.	Beam Angle	Fascia Colour	Version No.	Eg. Product Code
	W900	CR	3K	90/75°	White Silver	1.5	W900-CR-3K-90.75-W-1.5



• Available in white and silver, the versatile W900 Curve lends itself to every area of the home, as orientation, wash or feature lighting. Try mounting the W900 facing upwards 2100mm from the floor for an ambient wash of light on the ceiling.

W200 SX Curve LED wall light




Electrical:	Circuit Wattage: 6W	Delivered Light Efficacy: 33lm/W	Dimming: DALI (special order) Non-dimmable (BG-030ND-830mA)* *Drivers sold separately. Please select from pg136	Longevity: L70 B10 = 40,000 Hrs L50 = 65,000 Hrs
Optical:	Delivered Lumens: 200lm	Colour Temperature: 3000K (3K) 2700K (2.7K) (special order) 5000K (5K) (special order)	Beam Angle: 180°/20°	Tru-Colour: Yes
Physical:	Hole Cutout: 44mm	Gimbal Angle: 30° Universal	Warranty: 7 years of luminaire warranty	IP Rating: IP22
	Type: Wall light	Body Colour: N/A	Fascia Colour: ● White (W) ● Silver (S)	Fascia Style: N/A

Photometrics:



Dimensions:

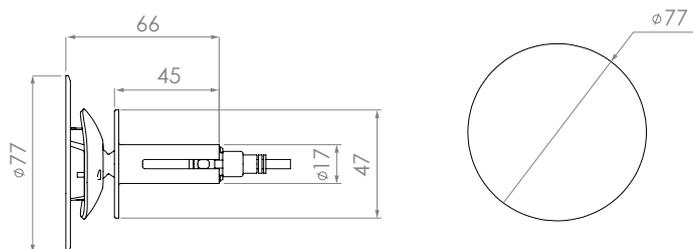


Specifying Product:

<u>Product Name</u>	<u>Family</u>	<u>Colour Temp.</u>	<u>Beam Angle</u>	<u>Fascia Colour</u>	<u>Version No.</u>	<u>Eg. Product Code</u>
W200.SX	CR	3K	180°/20°	White Silver	2.0	W200.SX-CR-3K-180.20-W-2.0

• Create feature walls or ambient orientation lighting in hallways and staircases using the petite W200 SX Curve.




W900 SX Curve LED wall light

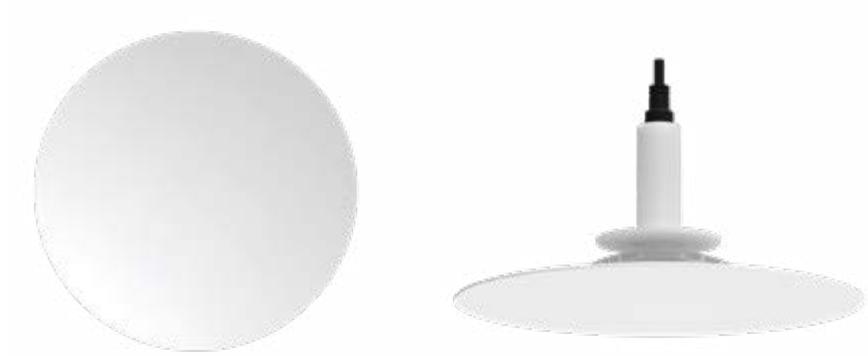


Electrical:	Circuit Wattage: 15W	Delivered Light Efficacy: 60lm/W	Dimming: DALI (special order) Non-dimmable (BG-030ND-830mA)* *Drivers sold separately. Please select from pg136	Longevity: L70 B10 = 40,000 Hrs L50 = 65,000 Hrs
Optical:	Delivered Lumens: 900lm	Colour Temperature: 3000K (3K) 2700K (2.7K) (special order) 5000K (5K) (special order)	Beam Angle: 180°/20°	Tru-Colour: Yes
Physical:	Hole Cutout: 44mm	Gimbal Angle: 20° Universal	Warranty: 7 years of luminaire warranty	IP Rating: IP22
	Type: Wall light	Body Colour: N/A	Fascia Colour: ● White (W) ● Silver (S)	Fascia Style: N/A

Photometrics:

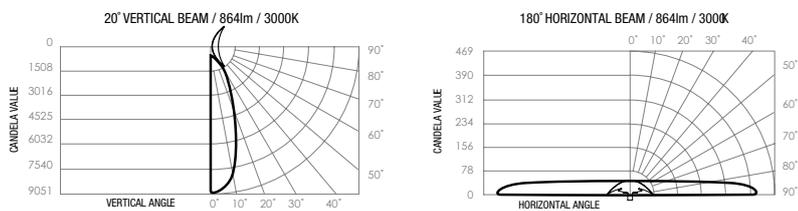

Dimensions:

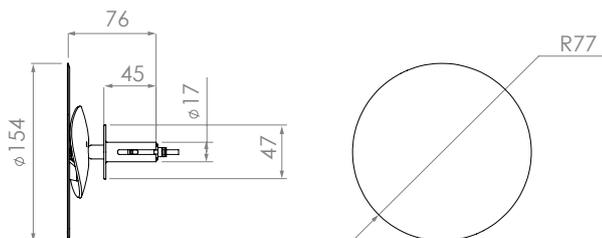


Specifying Product:

<u>Product Name</u>	<u>Family</u>	<u>Colour Temp.</u>	<u>Beam Angle</u>	<u>Fascia Colour</u>	<u>Version No.</u>	<u>Eg. Product Code</u>
W900.SX	CR	3K	180°/20°	White Silver	2.0	W900.SX-CR-3K-180.20-W-2.0



- This flexible wall light features a retractable mount that rotates 360-degrees and tilts 20-degrees to project curved feature lighting across interior surfaces. Use with the W200 SX to make dynamic lighting artworks.

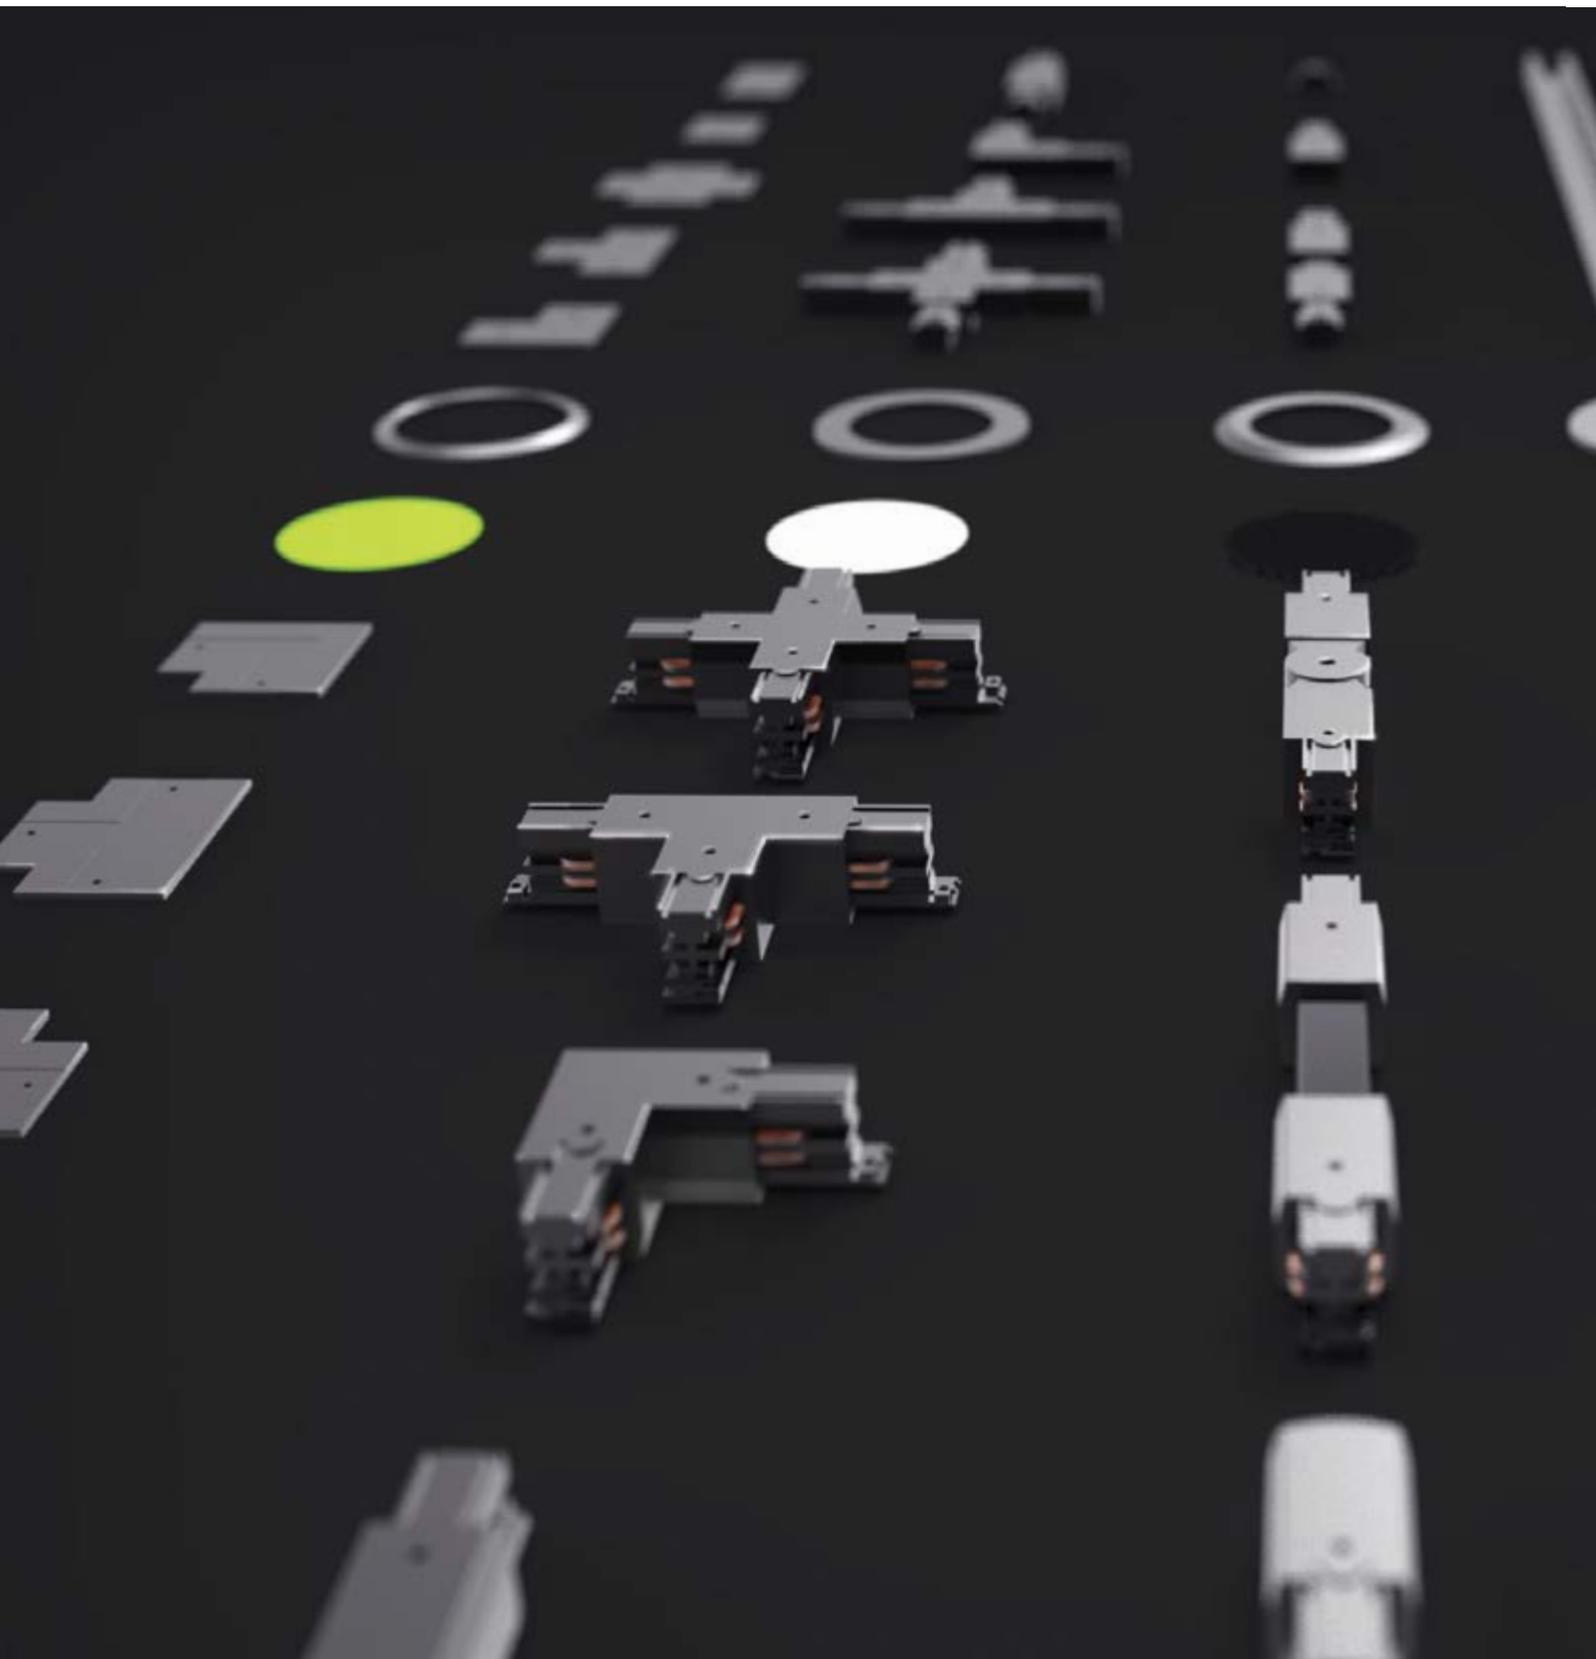



LINEAR


CUBE

CURVE

ACCESSORIES



Fascias



Product Name	Compatible Products	Size:	Colour:
Flatline (FLT)	D900+-CR	150mm*	<ul style="list-style-type: none"> ● White (W) ● Silver (S) ● Black (B) ● Champagne Gold (CG) ● Copper (C) ● Gunmetal (GM)
	D700+-CR	150mm*	
	D900+-CR	130mm*	
	D700+-CR	130mm*	
	D900+-CR	108mm	
	D700+-CR	108mm	
	D550+-CR	80mm	

* limited color availability



Product Name	Compatible Products	Size:	Colour:
Capsule (CAP)	D900+-CR	108mm	<ul style="list-style-type: none"> ● White (W) ● Silver (S) ● Black (B) ● Champagne Gold (CG) ● Copper (C) ● Gunmetal (GM)
	D700+-CR	108mm	
	D550+-CR	80mm	



Product Name	Compatible Products	Size:	Colour:
Fineline (FNL)	D900+-CR	108mm	<ul style="list-style-type: none"> ● White (W) ● Silver (S) ● Black (B) ● Champagne Gold (CG) ● Copper (C) ● Gunmetal (GM)
	D700+-CR	108mm	
	D550+-CR	80mm	



Product Name	Compatible Products	Size:	Colour:
Heavyweight (HWT)	D900+-CR	108mm	<ul style="list-style-type: none"> ● White (W) ● Silver (S) ● Black (B) ● Champagne Gold (CG) ● Copper (C) ● Gunmetal (GM)
	D700+-CR	108mm	
	D550+-CR	80mm	




Product Name	Compatible Products	Size:	Colour:
Portal (POR)	D900+-CR	108mm	<ul style="list-style-type: none"> ● White (W) ● Silver (S) ● Black (B) ● Champagne Gold (CG) ● Copper (C) ● Gunmetal (GM)
	D700+-CR	108mm	
	D550+-CR	80mm	

Specifying Product:	Product Name	Family	Size	Colour	Eg. Product Code
	HWT	FAS	108	White	HWT-FAS-108-W
	FNL		80	Silver	
	FLT			Black	
	POR			Champagne Gold	
	CAP			Copper	
				Gunmetal	

- Whether you want an understated look, or an eye-catching feature, fascias provide the freedom to style and shape your lighting to better suit your design.




Filters



<u>Product Name</u>	<u>Compatible Fascias:</u>	<u>Sizes:</u>	<u>CCT Shift</u>
Blue (BL)	Heavyweight Flatline Fineline Portal Capsule	100mm 70mm	3000K to 4000K 4000K to 5000K
		<u>Lumen Shift:</u> 30%	<u>Wavelength Range:</u> 450-490nm



<u>Product Name</u>	<u>Compatible Fascias:</u>	<u>Sizes:</u>	<u>CCT Shift</u>
Amber (AM)	Heavyweight Flatline Fineline Portal Capsule	100mm 70mm	4000K to 3000K 3000K to 2200K
		<u>Lumen Shift:</u> 30%	<u>Wavelength Range:</u> 570-600nm



<u>Product Name</u>	<u>Compatible Fascias:</u>	<u>Sizes:</u>	<u>CCT Shift</u>
Honeycomb (HC)	Heavyweight Flatline Portal Capsule	84mm 58mm	N/A
		<u>Lumen Shift:</u> 30%	<u>Wavelength Range:</u> N/A



<u>Product Name</u>	<u>Compatible Fascias:</u>	<u>Sizes:</u>	<u>CCT Shift</u>
Diffused (DF)	Heavyweight Flatline Fineline Portal Capsule	100mm 70mm	N/A
		<u>Lumen Shift:</u> 10%	<u>Wavelength Range:</u> N/A



<u>Product Name</u>	<u>Compatible Fascias:</u>	<u>Sizes:</u>	<u>CCT Shift</u>
Green (GR)	Heavyweight Flatline Fineline Portal Capsule	100mm 70mm	N/A
		<u>Lumen Shift:</u> 30%	<u>Wavelength Range:</u> 510-530nm

<u>Specifying Product:</u>	<u>Product Name</u>	<u>Family</u>	<u>Size</u>	<u>Eg. Product Code</u>
	AM	FIL	100	AM-FIL-100
	BL		70	
	GR		84 (HC)	
	HC		58 (HC)	
	DF			



- Customise the light distribution and colour of your lighting by pairing a filter with your fascia. Try a honeycomb filter to minimise glare or an opaque diffuser for a soft, even spread of illumination. Amber, blue and green filters are also available for designers looking to add a splash of colour to interiors.

Tracks



Product Name	Standard Length (metres)	Colour:
H-Track, single-circuit, surface (H1.S)	1 2	<input type="radio"/> White (W) <input checked="" type="radio"/> Black (B)



Product Name	Standard Length (metres)	Colour:
Eurotrack, 3-circuit, surface (E3.S)	1 2	<input type="radio"/> White (W) <input checked="" type="radio"/> Black (B)



Product Name	Standard Length (metres)	Colour:
H-Track, single-circuit, recessed (H1.R)	1 2	<input type="radio"/> White (W) <input checked="" type="radio"/> Black (B)



Product Name	Standard Length (metres)	Colour:
Eurotrack, 3-circuit, surface (E3.R)	1 2	<input type="radio"/> White (W) <input checked="" type="radio"/> Black (B)

Specifying Product:	Product Name	Standard Length (metres)	Colour	Eg. Product Code
	H1.S	1	White	H1.S-1-W
	E3.S	2	Black	
	H1.R			
	E3.R			



- Available in Euro and H-track options, Brightgreen tracks can easily be cut to size and configured using our range of track connectors. Whether you prefer to mount them directly onto the wall or ceiling, or recess the track into plaster, these tracks provide a reliable power source for any compatible luminaire.

Track accessories



Product Name:


Live End Connector (LEC)

Compatible Track:

HS
ES
HR
ER

Colour:

○ White (W)
● Black (B)



Product Name:


Live Straight Connector (LSC)

Compatible Track:

HS
ES
HR
ER

Colour:

○ White (W)
● Black (B)



Product Name:


Live Flexible Connector (LFC)

Compatible Track:

HS
ES
HR
ER

Colour:

○ White (W)
● Black (B)



Product Name:


L-Connector (LC)

Compatible Track:

HS
ES
HR
ER

Colour:

○ White (W)
● Black (B)



Product Name:


T-Connector (TC)

Compatible Track:

HS
ES
HR
ER

Colour:

○ White (W)
● Black (B)



Product Name:


X-Connector (XC)

Compatible Track:

HS
ES
HR
ER

Colour:

○ White (W)
● Black (B)



Product Name:

Straight Connector (SC)

Compatible Track:

HS
ES
HR
ER

Colour:

○ White (W)
● Black (B)

Specifying Product:	Product Name	Compatible Track	Colour	Eg. Product Code
	LEC	TC	HS	LEC-HS-W
	LSC	XC	ES	
	LFC	SC	HR	
	LC	ER	Black	
			Black	

- Create a track configuration that will provide you with the flexibility to alter your lighting scheme for years to come with our range of track accessories.



Drivers

Constant current



Product Name:	Dimming:	Wattage:	DC Voltage:	Current:
BG-05BSD	PHASE	5W	8-12V	400mA
BG-08BSD	PHASE	8W	30-42V	200mA
BG-010BSD	PHASE	12W	30-42V	250mA



BG-018BSD	PHASE	16W 18W	30-42V	350mA 430mA
-----------	-------	------------	--------	----------------



BG-030BSD	PHASE	30W	30-42V	700mA
-----------	-------	-----	--------	-------



BG-015DALI	DALI	15W	6-48V	150-1050mA
BG-025DALI	DALI	25W	6-48V	180-700mA

Specifying Product:	Product Name	Current	Eg. Product Code
	BG-04BSD	400mA	BG-04BSD-400mA

Constant voltage



Product Name:	Dimming:	Wattage:	DC Voltage:	Current:
BG-30SD	PHASE	30W	24V	1.25A
BG-80SD	PHASE	80W	24V	3.3A



BG-150SD	PHASE	150W	24V	6.25A
----------	-------	------	-----	-------

Specifying Product:	Product Name	DC Voltage	Eg. Product Code
	BG-30SD	24V	BG-30SD-24V

A close-up photograph of a white, cylindrical object, likely a light fixture or component, with the word "brightgreen." embossed on its surface in a lowercase, serif font. The object is positioned horizontally and is set against a light gray background. The lighting is soft, highlighting the texture of the material and the embossed text.

brightgreen.

- Our selection of electronic drivers for custom projects are designed to ensure seamless lighting performance and longer product lifetimes.



EXPERT LIGHTING DESIGN

MAKE THE MOST OF YOUR SPACE WITH AN EXPERT LIGHTING DESIGN

Save time with an expert opinion. Our professional lighting designs offer more vibrant colour for your space, at the same brightness, with half the lights you'd normally require. Simply send us your floor plan, and our designers will work with you toward fulfilling your vision from start to finish.

Our Lighting Design Experts are available to help with your lighting layout and integration with control systems.

Simply upload your floor plans at www.brightgreen.com/expert-lighting-design or email design@brightgreen.com


Here are a few testimonials we have received for our service

Katie Hume, Interior Designer

Brightgreen's design team created depth in my space with the minimal amount of lights. The quality of the design brought depth and luxury to the space, and quality of the light made the best of the materials we choose for the space.

Jenny Knox - Risk & Audit Officer, Victorian Government

I cannot thank the Brightgreen design team enough, from the initial comprehensive phone call discussing what I wanted, to the numerous changes afterward - nothing I requested was too much trouble and the team really will work within your budget. My husband and I were both delighted in the overall design service; making a daunting task of working out lighting colour, brightness and lighting effects, extremely manageable and worry free. We cannot wait to see our lights and the effect they create in our new home.

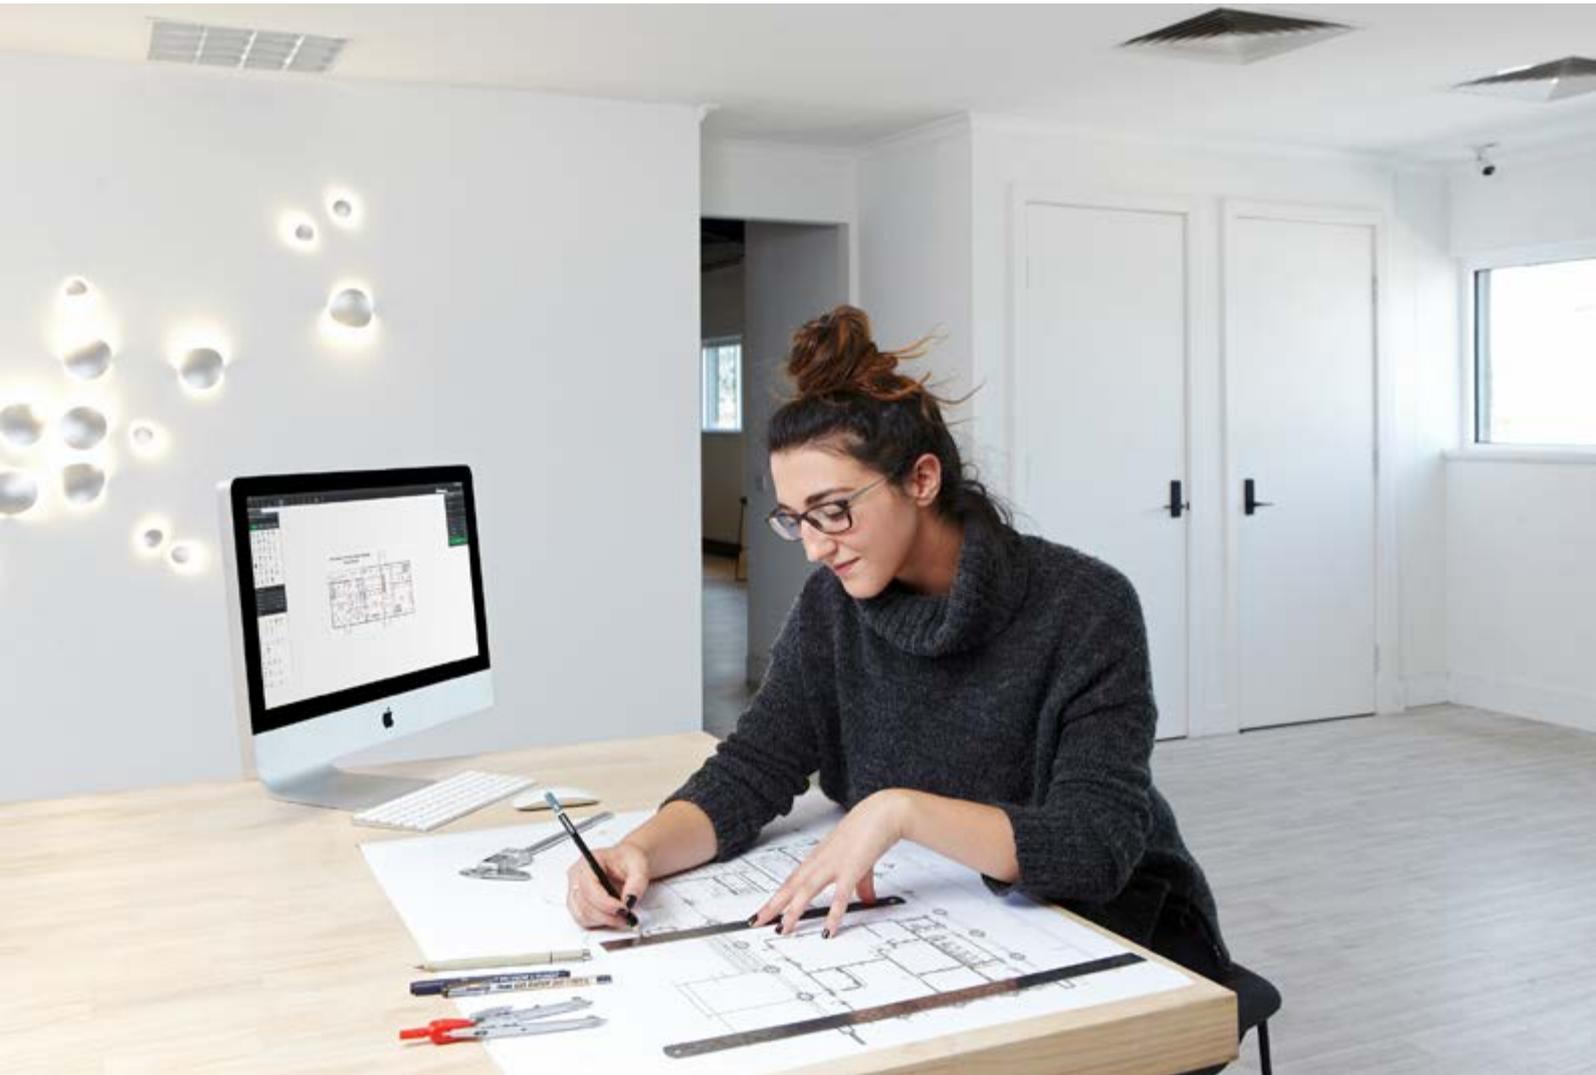

PRODUCT NAMING CONVENTIONS

Understanding each Brightgreen product name can be tricky, particularly as our product range continues to expand.

The key below helps you to decode our product names based on a simple system that describes each feature.

D900 SHX CURVE



PRIMARY LETTERS

- CH - Clothes hanger
- D - Downlight
- F - Floor
- P - Pendant
- T - Track light
- W - Wall
- R - Recessed
- S - Surface

SECONDARY LETTERS

- H - High
(Elongate along the vertical)
- PC - Penguin Clip
- S - Surface mounted
- X - Adjustable

SERIES NAME

- CR - Curve
- CB - Cube
- LN - Linear

DECODING PRODUCT CODES

Our product order code system works in a similar way.

Each component describes a feature such as the fitting, beam angle and fascia colour, allowing our distributors to order exactly the right product.

D900.SHX-CR-3K-55-W



- 3000K - Warm white
- 4000K - Neutral white

Directional unless abbreviated to:

- BW40 - Batwing 40°/40°
- WF60 - Wide flood 60°
- AS40 - Asymmetrical 40°
- DF180 - Diffused 180°
- S - Silver
- W - White
- B - Black



brightgreen.com