





THE WORLD'S MOST **FLEXIBLE**POWER OUTLET SYSTEM





























Compliance

Guarantee



SFC3 MODULAR TRACK

ELECTRICAL	
Rated Voltage	250V a.c. Single-phase
Rated Current	32 Amp maximum
Frequency	50Hz / 60Hz
Rated Impulse Withstand Voltage	4000V a.c.
Connection of Adaptor or Tap-off Unit	Intended to be connected and disconnected when system is energized and with a load connected
Terminal Capacity: Live, Neutral & Earth	1.25 mm ² to 6 mm ²
ENVIRONMENTAL	
Ambient Operating Temperature	-5°C to +55°C (not to exceed an average of more than 35°C in any 24 hours period)
Maximum Installation Altitude	2000 meters
Resistance to Impact	Heavy Impact
Degree of Protection	I P4X
Degree of Po ll ution	2 (Non-conductive pollution with temporary conductivity caused by condensation)
MATERIAL	
Track	Aluminium
Insulation	Polycarbonate
SIZE AND WEIGHT (Based On 1 meter Length)	
Overall Dimension (Width x Depth)	62mm x 26mm
Weight	Estimated 1.2 kilograms

IEC EN 61534-1, IEC EN 61534-21 (DEKRA/KEMA test report) DNV Standard for Certification No 2.4 (PSB Test Report)

2 years subject to Eubiq Limited Warranty Statement

(Applicable to track ONLY)

Article No	Products Description	Length
827.41.001	SFC3 Power Track with 1 End Terminal and 1 Dummy Terminal	300mm
827.41.002	SFC3 Power Track with 1 End Terminal and 1 Dummy Terminal	400mm
827.41.003	SFC3 Power Track with 1 End Terminal and 1 Dummy Terminal	600mm
827.41.004	SFC3 Power Track with 1 End Terminal and 1 Dummy Terminal	800mm
827.41.005	SFC3 Power Track with 1 End Terminal and 1 Dummy Terminal	1000mm
827.41.006	SFC3 Power Track with 1 End Terminal and 1 Dummy Terminal	1200mm
827.41.007	SFC3 Power Track with 1 End Terminal and 1 Dummy Terminal	1400mm
827.41.008	SFC3 Power Track with 1 End Terminal and 1 Dummy Terminal	1600mm
827.41.009	SFC3 Power Track with 1 End Terminal and 1 Dummy Terminal	1800mm
827.41.010	SFC3 Power Track with 1 End Terminal and 1 Dummy Terminal	2000mm
827.41.021	SFC3 Power Track with End Terminal Set (ET on both side)	300mm
827.41.022	SFC3 Power Track with End Terminal Set (ET on both side)	400mm
827.41.023	SFC3 Power Track with End Terminal Set (ET on both side)	600mm
827.41.024	SFC3 Power Track with End Terminal Set (ET on both side)	800mm
827.41.025	SFC3 Power Track with End Terminal Set (ET on both side)	1000mm
827.41.026	SFC3 Power Track with End Terminal Set (ET on both side)	1200mm
827.41.027	SFC3 Power Track with End Terminal Set (ET on both side)	1400mm
827.41.028	SFC3 Power Track with End Terminal Set (ET on both side)	1600mm
827.41.029	SFC3 Power Track with End Terminal Set (ET on both side)	1800mm
827.41.030	SFC3 Power Track with End Terminal Set (ET on both side)	2000mm







SH 1

Power and cable management track



2 <u>8.5mm</u>		
A		
В	100mm	
70		

Article No.	Standard Length
827.41.500	600 mm
827.41.501	900 mm
Article No.	Customised Length
827.41.210	300-3600 mm

Standard length comes with hanger and hooks.

SC₂

Ultra compact track

(Only Housing)





Article No.	Customised Length
827.41.220 (Only Housing)	300-3600 mm




RH 1


Recess power and cable management track



Article No.	Customised Length
827.41.230 (Only Housing)	300-3600 mm



Recess power and data track



















HP 4





Surface mounted modular bed head panel






Comes with Provision for lights





ADAPTORS ACCESSORIES MULTIMEDIA CONNECTORS

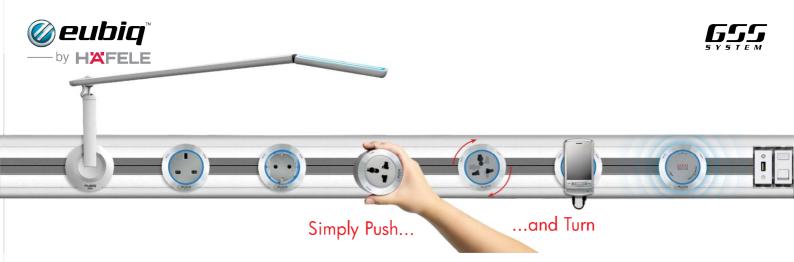

ADAPTORS

PREMIUM SERIES



INTERNATIONAL TRAVELLER Article No.: 827.41.423



INDIA COMBO

Article No.: 827.41.422

COMPACT SERIES



INTERNATIONAL TRAVELLER

Article No.: 827.41.421

CLASSIC SERIES



INDIA COMBO

Article No.: 827.41.420

ACCESSORIES



Premium Surge Protector Article No.: 827.41.425



Premium USB Charger Article No.: 827.41.424



Rewirable Plug



Kitchen Rail/ Hook

Tananan, Traan		
Article No.: 827.41.351 (RAIL)	Length: 400 mm	
827.41.352 (RAIL)	600 mm	

Article No.: 827.41.360 (HOOK)



Aladin LED Task Light

Article No.: 827.41.447

COILED CORDSET



Article No.: 827.41.432



Article No.: 827.41.431



Article No.: 827.41.430